

DDCouplingsBry Disconnect Couplings



Product Information



Table of Content

lable of Content		
1" (Ø 56 mm) Tank Unit (Adapter) and Hose Unit (Coupler)	je	4-8
2" (Ø 70 mm) Tank Unit (Adapter) and Hose Unit (Coupler)		9-13
2½" (Ø 105 mm) Tank Unit (Adapter) and Hose Unit (Coupler)		14-17
3" (Ø 119 mm) Tank Unit (Adapter) and Hose Unit (Coupler)		18-21
4" (Ø 164 mm) Tank Unit (Adapter) and Hose Unit (Coupler)		22-24
6" (Ø 238 mm) Tank Unit (Adapter) and Hose Unit (Coupler)		25-26
8" (Ø 272 mm) Tank Unit (Adapter) and Hose Unit (Coupler)		27-28
About NPT and BSP Threads		49
Company and Product Information, Approvals and Your Distributor		56
DDCouplings - Options and Special Versions		39-43
Dust Cap for Tank Unit (Adapter)		29
Dust Plug for Hose Unit (Coupler)		31
Flange Facing Types to EN 1092		44
Flange Measurements		45-46
Flow Diagram / Pressure Drop		53
O-Ring Materials		48
Operating Advice		50
Options		39 - 44
Order Number Breakdown		37-38
Parking Adapter		32
Pressure Cap for Tank Unit (Adapter)		30
Repair Service: Certificate of Decontamination		54
Sealing Cap for Tank Unit (Adapter)		31
Selectivity		32-36
Service Instructions		51-52
Thread Seals (Flat Seals)		47

Note: Mann Tek reserves the right to make design modifications without previous written notice.











1" (Ø 56 mm) Technical Information

Tank Unit (Adapter) and Hose Unit (Coupler)



Material	Maximum Working Pressure	Test Pressure	Minimum Burst Pressure
Aluminium	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi
Brass/Gunmetal	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi
Stainless Steel	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
Titan	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
Hastelloy	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
PEEK	6 bar / 87 psi	9 bar / 131 psi	30 bar / 435 psi

Connections

34", 1" and 114" in BSP, NPT or metrical thread, or flanged inlet.

Applications

For industrial process plant, road and rail tankers, IBC containers, pharmaceutical and petrochemical industries, diesel locomotive refuelling etc. Recommended for all types of mini bulk liquid product transfer, including container and drum filling, or on any application where spillage needs to be minimized.

Media

Petroleum products: gasoline, diesel, oil etc. **Chemical products**: e. g. ethylene oxide, propylene oxide, acrylonitrile, butadiene, ammonia, vinyl chloride, toluene, xylene, sulphuric acid, phenol etc.

Gas: vapor recovery/balance systems for various media.

Material of Body

Aluminium, brass, stainless steel, Hastelloy and PEEK. Others on request.

Seals

Standard seals in FPM (Viton®) - alternatively EPDM, FKM (Chemraz®, Kalrez®), NBR/HBNR. Other materials on request.

High Flow Rates / Low Pressure Drop

Allows maximum product transfer with minimal losses

Recommended Maximum Flow Rates 200 litres/minute (fuel)

Selectivity

- avoid mixing products

To avoid product contamination caused by connecting a hose unit to the wrong tank unit, selective versions of the hose and tank units are available. Each unit has a number of selective positions, designated by a coded part number according to the coupling size – specify when placing order. See page 32 ff.

Interchangeability

Compatible with couplings of other manufacturers.

Hose Unit with Integrated Swivel

All hose units are supplied with an integrated swivel.

1" (Ø 56 mm) DDCouplings

1" (Ø 56 mm) Tank Unit (Adapter) - Female Thread

Commontion 1)	Dorte		Seal	Weig	ght ≈	Many Tak
Connection 1) Inch/DN	Body Material ²⁾	O-Ring ³⁾	Flat Seal	kg	lbs	Mann Tek Code No.
F ½" BSP						T1133A1101B
F ¾" BSP						T101A1101B
F 1" BSP			PUR (Polyurethane)			T103A1101B
F 11/4" BSP			(Polyurethane)			T105A1101B
F M 54 x 1,5	Al			0,3	0.7	T1138A1101B
F ½" NPT						T1132A1101
F ¾" NPT			_			T102A1101
F 1" NPT			_			T104A1101
F 11/4" NPT						T106A1101
F ½" BSP						T1133A2201B
F ¾" BSP			PUR			T101A2201B
F 1" BSP			(Polyurethane)			T103A2201B
F 11/4" BSP			, , , , , , , , , , , , , , , , , , , ,			T105A2201B
F M 54 x 1,5	Br			0,7	1.5	T1138A2201B
F ½" NPT						T1132A2201
F ¾" NPT			_			T102A2201
F 1" NPT						T104A2201
F 1¼" NPT						T106A2201
F ½" BSP				0,7		T1133A4401B
F ¾" BSP		0	PTFE (Teflon®)			T101A4401A
F 1" BSP		Standard: FPM/FKM				T103A4401A
F 1¼" BSP		(Viton®)				T105A4401A
F M 54 x 1,5	SS	,			1.5	T1138A4401A
F ½" NPT		Other on	_			T1132A4401
F ¾" NPT		request.				T102A4401
F 1" NPT						T104A4401
F 1¼" NPT F ¾" BSP						T106A4401 T101A6601A
F 1" BSP			PTFE			T103A6601A
F 11/4" BSP			(Teflon®)			T105A6601A
F 34" NPT	Titan			0,4	0.9	T102A6601
F 1" NPT						T102A6601
F 11/4" NPT			_			T106A6601
F 34" BSP						T101A7701A
F 1" BSP			PTFE			T103A7701A
F 11/4" BSP			(Teflon®)			T105A7701A
F 3/4" NPT	Hastelloy			0,8	1.8	T102A7701
F 1" NPT			_			T104A7701
F 11/4" NPT		_				T106A7701
F ¾" BSP		•				T101A9901A
F 1" BSP			PTFE			T103A9901A
F 11/4" BSP			(Teflon®)			T105A9901A
F 3/4" NPT	PEEK			0,1	0.2	T102A9901
F 1" NPT			_			T104A9901
F 1¼" NPT						T106A9901



Viton® and Teflon® are registred trademarks of DuPont, DuPont Elastomers.


¹⁾ F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1

²⁾ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request.


1" (Ø 56 mm) Tank Unit (Adapter) - Male Thread

Connection 1) Inch/DN	Body Material ²⁾	Seal ³⁾	Weig	ght ≈	Mann Tek Code No.
mon, Br	Material	O-Ring	kg	lbs	Codo No.
M ¾" BSP					T169A1101
M ¾" NPT	Al				T170A1101
M 1" BSP	AI				T171A1101
M 1" NPT		Standard: FPM/FKM (Viton®)			T172A1101
M ¾" BSP					T169A1101
M ¾" NPT	D.				T170A1101
M 1" BSP	ы				T171A1101
M 1" NPT		Other on			T172A1101
M ¾" BSP		request.			T169A4401
M ¾" NPT	SS				T170A4401
M 1" BSP	33				T171A4401
M 1" NPT					T172A4401



1" (Ø 56 mm) Tank Unit (Adapter) - Flanged Inlet

Flange ¹⁾	Body	Seal ³⁾	Weig	ght ≈	Mann Tek
i lalige	Material ²⁾	O-Ring	kg	lbs	Code No.
undrilled					T118A1101
DN 25 PN 10/16 Type A					T123A1101
DN 25 PN 25/40 Type A	Al		1,1	2.4	T124A1101
1" ASA 150					T151A1101
1" ASA 300					T152A1101
undrilled]			T118A2201
DN 25 PN 10/16 Type B					T123A2201
DN 25 PN 25/40 Type B	Br		1,6	3.5	T124A2201
1" ASA 150					T151A2201
1" ASA 300					T152A2201
undrilled					T118A4401
DN 25 PN 10/16 Type B	SS				T123A4401
DN 25 PN 25/40 Type B		, , ,	1,5	3.3	T124A4401
1" ASA 150		FPM/FKM			T151A4401
1" ASA 300		(Viton®)			T152A4401
undrilled		Other on			T118A6601
DN 25 PN 10/16 Type B		request.			T123A6601
DN 25 PN 25/40 Type B	Titan		0,8	1.8	T124A6601
1" ASA 150					T151A6601
1" ASA 300					T152A6601
DN 25 PN 10/16 Type B					T123A7701
DN 25 PN 25/40 Type B	Uastallau		1.7	3.8	T124A7701
1" ASA 150	Hastelloy		1,7	3.0	T151A7701
1" ASA 300					T152A7701
undrilled]			T118A9901
DN 25 PN 10/16 Type B					T123A9901
DN 25 PN 25/40 Type B	PEEK		0,2	0.4	T124A9901
1" ASA 150					T151A9901
1" ASA 300					T152A9901



¹⁾ M = Male thread, BSP = EN ISO 228, NPT = ANSI B1.20.1

²⁾ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel,

[®] Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request.

 $^{^{1)}}$ PN 10/16/25/40 = EN 1092 (types see page 44), ANSI B16.5.

 $^{^{2)}}$ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel

[®] Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request.

1" (Ø 56 mm) DDCouplings

1" (Ø 56 mm) Hose Unit (Coupler) - Female Thread

Connection 1)	Dodu	Se	eal	Weig	ght ≈	Moun Tok
Connection 1) Inch/DN	Body Material ²⁾	O-Ring ³⁾	Thread Seal	kg	lbs	Mann Tek Code No.
F ½" BSP						S1133A1101B
F ¾" BSP						S101A1101B
F 1" BSP			PUR (Polyurethane)			S103A1101B
F 11/4" BSP			(Folyuretriane)			S105A1101B
F M 54 x 1,5	Al			0,5	1.1	S1138A1101B
F ½" NPT						S1132A1101
F ¾" NPT						S102A1101
F 1" NPT			_			S104A1101
F 11/4" NPT						S106A1101
F ½" BSP						S1133A2201B
F ¾" BSP			DUD			S101A2201B
F 1" BSP			PUR (Polyurethane)			S103A2201B
F 11/4" BSP			(i oryanotha o)			S105A2201B
F M 54 x 1,5	Br			1,4	3.1	S1138A2201B
F ½" NPT			_			S1132A2201
F ¾" NPT						S102A2201
F 1" NPT						S104A2201
F 1¼" NPT						S106A2201
F ½" BSP						S1133A4401A
F ¾" BSP		Standard: PTFE (Teflon®)			S101A4401A	
F 1" BSP			(Teflon®)	1,3		S103A4401A
F 11/4" BSP		FPM/FKM (Viton®)	FKW '			S105A4401A
F M 54 x 1,5	SS	(VIIOII)			2.9	S1138A4401A
F ½" NPT		Other on				S1132A4401
F ¾" NPT		request.	_			S102A4401
F 1" NPT						S104A4401
F 1¼" NPT						S106A4401
F ¾" BSP			PTFE			S101A6601A
F 1" BSP			(Teflon®)			S103A6601A
F 11/4" BSP	Titan		` ′	0,7	1.5	S105A6601A
F ¾" NPT				-,.	1.5	S102A6601
F 1" NPT			_			S104A6601
F 1¼" NPT						S106A6601
F ¾" BSP			PTFE			S101A7701A
F 1" BSP			(Teflon®)			S103A7701A
F 11/4" BSP	Hastelloy		, ,	1,5	3.3	S105A7701A
F ¾" NPT	,			,-		S102A7701
F 1" NPT			_			S104A7701
F 1¼" NPT						S106A7701
F 34" BSP			PTFE			S101A9901A
F 1" BSP			(Teflon®)			S103A9901A
F 11/4" BSP	PEEK		* *	0,3	0.7	S105A9901A
F ¾" NPT				,-		S102A9901
F 1" NPT			_			S104A9901
F 11/4" NPT						S106A9901



Viton® and Teflon® are registred trademarks of DuPont, DuPont Elastomers.

 $^{^{1)}}$ F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1

²⁾ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request.


1" (Ø 56 mm) Hose Unit (Coupler) - Male Thread

Connection 1)	Body	Seal ³⁾	Weig	ght ≈	Mann Tek	
Inch/DN	Material ²⁾	O-Ring	kg	lbs	Code No.	
M ¾" BSP					S169A1101	
M ¾" NPT	Al				S170A1101	
M 1" BSP	Ai				S171A1101	
M 1" NPT		Standard: FPM/FKM (Viton®)			S172A1101	
M ¾" BSP					S169A1101	
M ¾" NPT	D.				S170A1101	
M 1" BSP	ы				S171A1101	
M 1" NPT		Other on			S172A1101	
M ¾" BSP		request.			S169A4401	
M ¾" NPT	SS				S170A4401	
M 1" BSP	33				S171A4401	
M 1" NPT			1,4	3.0	S172A4401	



1" (Ø 56 mm) Coupler - Flanged Inlet

Flower 1)	Body			ght ≈	Mann Tek	
Flange ¹⁾	Material ²⁾	O-Ring	kg	lbs	Code No.	
undrilled					S118A1101	1
DN 25 PN 10/16 Type A					S123A1101	
DN 25 PN 25/40 Type A					S124A1101]
¾" ASA 150	Al		1,1	2.4	S149A1101	
1" ASA 150					S151A1101]
1" ASA 300					S152A1101	
DN 25 DIN 11864					S1151A1101	
undrilled]			S118A2201	
DN 25 PN 10/16 Type B					S123A2201	1
DN 25 PN 25/40 Type B	D.,		1.0	۰.	S124A2201	
34" ASA 150	Br		1,6	3.5	S149A2201	1
1" ASA 150]				S151A2201	
1" ASA 300					S152A2201	
undrilled]			S118A4401	
DN 25 PN 10/16 Type B		Standard:			S123A4401	1
DN 25 PN 25/40 Type B	SS	FPM/FKM	0.0	4.9	S124A4401	
¾" ASA 150	(Viton®) 2,2 4.9 Other on	(Viton®)	2,2	4.9	S149A4401	
1" ASA 150			S151A4401			
1" ASA 300		request.			S152A4401	
undrilled]			S118A6601	
DN 25 PN 10/16 Type B					S123A6601	
DN 25 PN 25/40 Type B	Titan		1,2	2.7	S124A6601	
1" ASA 150					S151A6601	
1" ASA 300					S152A6601	
DN 25 PN 10/16 Type B					S123A7701	
DN 25 PN 25/40 Type B	Hastelloy		2,5	5.5	S124A7701	
1" ASA 150	Hastelloy		2,3	5.5	S151A7701	
1" ASA 300					S152A7701	
undrilled					S118A9901	
DN 25 PN 10/16 Type B					S123A9901	
DN 25 PN 25/40 Type B	PEEK		0,5	0,5 1.1	S124A9901	
1" ASA 150				S151A9901		
1" ASA 300					S152A9901	



¹⁾ M = Male thread, BSP = EN ISO 228, NPT = ANSI B1.20.1

²⁾ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e. g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request.

PN 10/16/25/40 = EN 1092 (types see page 44),
 ASA = ANSI B16.5 (150 o. 300 psi), 150 or 300 psi.
 DIN 11864 = DIN 11864-2 (aseptic flange)

²⁾ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request.

2" (Ø 70 mm) Technical Information

Tank Unit (Adapter) and Hose Unit (Coupler)



According to NATO STANAG 3756

Material	Maximum Working Pressure	Test Pressure	Minimum Burst Pressure
Aluminium	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi
Brass/Gunmetal	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi
Stainless Steel	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
Titan	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
Hastelloy	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
PEEK	6 bar / 87 psi	9 bar / 131 psi	30 bar / 435 psi

Connections

1% " and 2" in BSP, NPT or S60x6 thread, or flanged inlet.

Applications

For industrial process plant, road and rail tankers, ISO tank containers, IBC containers, pharmaceutical and petrochemical industries or on any application where spillage needs to be minimized.

Media

Petroleum products: gasoline, diesel, oil etc. **Chemical products**: AdBlue, ethylene oxide, propylene oxide, acrylonitrile, butadiene, ammonia, vinyl chloride, toluene, xylene, sulphuric acid, phenol etc.

Gas: vapor recovery/balance systems for for various media.

Dry powder.

Material of Body

Aluminium, brass/gunmetal, stainless steel, Hastelloy and PEEK. Other materials on request.

Seals

Standard seals in FPM (Viton®) - alternatively EPDM, FKM (Chemraz®, Kalrez®), NBR/HBNR. Other materials on request.

High Flow Rates / Low Pressure Drop

Allows maximum product transfer with minimal losses.

Recommended Maximum Flow Rates 900 litres/minute (fuel)

Selectivity

- avoid mixing products

To avoid product contamination caused by connecting a hose unit to the wrong tank unit, selective versions of the hose and tank units are available.

Each unit has a number of selective positions, designated by a coded part number according to the coupling size – specify when placing order. See page 32 ff.

Interchangeability

Compatible with couplings of other manufacturers.

Hose Unit with Integrated Swivel

All hose units are supplied with an integrated swivel.

2" (Ø 70 mm) DDCouplings

2" (Ø 70 mm) Tank Unit (Adapter) - Female Thread

Connection 1)	Body	Se	Seal		ght ≈	Mann Tek	
Inch/DN	Material ²⁾	O-Ring ³⁾	Thread Seal	kg	lbs	Code No.	
F 1½" BSP						T207A1101B	
F 2" BSP			PUR	0,4	0.8	T210A1101B	
F S60x6	Al		(Polyurethane)	0,4	0.0	T2108A1101B	
F W2" - 7	Α'					T2112A1101B	
F 1½" NPT			_	0.4	0.8	T208A1101	
F 2" NPT				0.4	0.0	T211A1101	
F 1½" BSP				1,2	2.7	T207A2201B	
F 2" BSP			PUR	1,1	2.4	T210A2201B	
F S 60 x 6	Br		(Polyurethane)	1,0	2.2	T2108A2201B	
F W2" - 7	ы			1,0	0.9	T2112A2201B	
F 1½" NPT		_	0,4	0.9	T208A2201		
F 2" NPT			_	1,1	2.4	T211A2201	
F 1½" BSP		Standard: FPM/FKM (Viton®) Other on	1,1	2.4	T207A4401A		
F 2" BSP			1,0	2.2	T210A4401A		
F S60 x 6	SS		1,0	2.2	T2108A4401A		
F 1½" NPT			1,2	2.7	T208A4401		
F 2" NPT		request.	_	1,1	2.4	T211A4401	
F 1½" BSP			PTFE			T207A6601A	
F 2" BSP	Titan		(Teflon®)	0,6	1.3	T210A6601A	
F 1½" NPT	IIIaii					T208A6601	
F 2" NPT			_	0,6	1.3	T211A6601	
F 1½" BSP			PTFE			T207A7701A	
F 2" BSP	Hootelles.		(Teflon®)			T210A7701A	
F 1½" NPT	Hastelloy					T208A7701	
F 2" NPT			_			T211A7701	
F 1½" BSP]	PTFE			T207A9901A	
F 2" BSP	DEEK		(Teflon®)	0,3	0.6	T210A9901A	
F 1½" NPT	PEEK					T208A9901	
F 2" NPT			_	0,3	0.6	T211A9901	

According to NATO STANAG 3756



2" (Ø 70 mm) Tank Unit (Adapter) - Male Thread

Flange¹)	Body	Seal ³⁾	Weight ≈		Mann Tek	
rialiye [/]	Material ²⁾	O-Ring	kg	lbs	Code No.	
M 2" BSP		Al Standard: FPM/FKM	1,0	2.2	T278A1101	
M 2" NPT	Al				T279A1101	
M W2" - 7					T2123A1101	
M 2" BSP	_	(Viton®)			T278A2201	
M 2" NPT	Br				T279A2201	
M W2" - 7		Other on			T2123A2201	
M 2" BSP	66	request.	1,0	2.2	T278A4401	
M 2" NPT	SS		1,1	2.4	T279A4401	

According to NATO STANAG 3756



¹⁾ M = Male thread, BSP = EN ISO 228, NPT = ANSI B1.20.1, S 60 x 6 = thread for IBC, W 2" heating oil connection Sweden

¹⁾ F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1, S60 x 6 = thread for IBC, W 2" heating oil connection Sweden

²⁾ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request.


²⁾ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request.

2" (Ø 70 mm) Tank Unit (Adapter) - Flanged Inlet

Seal³⁾ Weight ≈ **Body** Mann Tek Flange¹⁾ Material²⁾ Code No. **O-Ring** kg lbs T219B1101 2.2 undrilled Ø 165 mm 1,0 DN 40 PN 10/16 Type A 0,9 2.0 T227B1101 11/2" ASA 150 0,8 1.8 T255B1101 ΑI DN 50 PN 10/16 Type A 1,0 2.2 T230B1101 T257B1101 2" ASA 150 0,9 2.0 DIN 28459 'TW 1' / DN 80 0,9 2.0 T265B1101 undrilled Ø 165 mm 3,3 7.3 T219B2201 DN 40 PN 10/16 Type B 5.5 2,5 T227B2201 DN 40 PN 25/40 Type B T228B2201 11/2" ASA 150 2,2 4.9 T255B2201 11/2" ASA 300 T256B2201 **GM** DN 50 PN 10/16 Type B 3,1 6.8 T230B2201 DN 50 PN 25/40 Type B T231B2201 2" ASA 150 2,5 5.1 T257B2201 2" ASA 300 T258B2201 DIN 28459 'TW 1' / DN 80 2,4 5.3 T265B2201 undrilled Ø 165 mm 3,2 7.1 T219B4401 undrilled Ø 165 mm **) T219B4401F DN 40 PN 10/16 Type B 2,4 5.3 T227B4401 DN 40 PN 10/16 Type B **) T227B4401F DN 40 PN 25/40 Type B 2,4 5.3 T228B4401 DN 40 PN 25/40 Type B **) T228B4401F 11/2" ASA 150 1.7 3.8 T255B4401 1½" ASA 150 **) T255B4401F 1½" ASA 300 2.1 4.6 T256B4401 1½" ASA 300 **) T256B4401F DN 50 PN 25/40 Type E *) T229B4401 SS 2,9 6.4 DN 50 PN 10/16 Type B 2,7 6.0 T230B4401 Standard: DN 50 PN 10/16 Type B **) T230B4401F FPM/FKM 3,0 DN 50 PN 25/40 Type B 6.6 T231B4401 (Viton®) DN 50 PN 25/40 Type B **) T231B4401F Other on 2,4 2" ASA 150 5.3 T257B4401 reauest. 2" ASA 150 ** T257B4401F 2,5 2" ASA 300 5.5 T258B4401 2" ASA 300 **) T258B4401F DIN 28459 'TW 1' / DN 80 T265B4401 DN 50 DIN 11864 T2152B4401 undrilled Ø 165 mm T219A6601 DN 40 PN 10/16 Type B T227A6601 DN 40 PN 25/40 Type B T228A6601 11/2" ASA 150 1,7 T255A6601 11/2" ASA 300 Titan T256A6601 DN 50 PN 10/16 Type B T230A6601 DN 50 PN 25/40 Type B T231A6601 2" ASA 150 T257A6601 2" ASA 300 T258A6601 undrilled Ø 165 mm T219A7701 DN 40 PN 10/16 Type B T227A7701 DN 40 PN 25/40 Type B T228A7701 1½" ASA 150 T255A7701 11/2" ASA 300 B Hastelloy T256A7701 DN 50 PN 10/16 Type B T230A7701 DN 50 PN 25/40 Type B T231A7701 2" ASA 150 T257A7701 2" ASA 300 T258A7701 undrilled Ø 165 mm T219A9901 DN 40 PN 10/16 Type B 2.0 1,0 T227A9901 1½" ASA 150 **PEEK** T255A9901 DN 50 PN 10/16 Type B 1,0 2.0 T230A9901 T257A9901 2" ASA 150 1,0 2.0

According to NATO STANAG 3756



^{*)} Type E (with spigot), EN 1092-1, see p. 44

^{**)} Flange with standard thickness

PN 10/16/25/40 = EN 1092 (types see page 44),
 ASA = ANSI B16.5 (150 o. 300 psi),
 DIN 28459 = old standard TW, 10 bar.
 DIN 11864 = DIN 11864-2 (aseptic flange)

Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request.

2" (Ø 70 mm) Hose Unit (Coupler) - Female Thread

Connection 1)	Body	on" Body		Wei	ght ≈	Mann Tek
Inch/DN	Material ²⁾	O-Ring ³⁾	Thread Seal	kg	lbs	Code No.
F 1½" BSP				1,2	2.7	S207A1101B
F 1½" BSP-B Mouth*)			PUR			S207A1101BI
F 2" BSP			(Polyurethane)	1,1	2.4	S210A1101B
F 2" BSP-B Mouth*)	AI			1,1	2.4	S210A1101BI
F 1½" NPT	Ai			1,1	2.4	S208A1101
F 1½" NPT-B Mouth*)						S208A1101I
F 2" NPT			_	1,1	2.4	S211A1101
F 2" NPT-B Mouth*)						S211A1101I
F 1½" BSP				2,6	5.7	S207A2201B
F 1½" BSP-B Mouth*)			PUR			S207A2201BI
F 2" BSP			(Polyurethane)	2,4	5.3	S210A2201B
F 2" BSP-B Mouth*)	D.,	Standard: _			S210A2201BI	
F 1½" NPT	Br		2,5	5.5	S208A2201	
F 1½" NPT-B Mouth*)					S208A2201I	
F 2" NPT			2,5	5.5	S211A2201	
F 2" NPT-B Mouth*)		(Viton®)				S211A2201I
F 1½" BSP			PTFE	2,5	5.5	S207A4401A
F 2" BSP	SS	Other on	(Teflon®)	2,3	5.1	S210A4401A
F 1½" NPT	55	request.		2,4	5.3	S208A4401
F 2" NPT			_	2,3	5.1	S211A4401
F 1½" BSP			PTFE	1,3	2.9	S207A6601A
F 2" BSP			(Teflon®)	1,3	2.9	S210A6601A
F 1½" NPT	Titan					S208A6601
F 2" NPT			_	1,4	3.1	S211A6601
F 1½" BSP			PTFE	2,3	5.1	S207A7701A
F 2" BSP			(Teflon®)	2,3	5.1	S210A7701A
F 1½" NPT	Hastelloy			2,3	5.1	S208A7701
F 2" NPT			_	2,3	5.1	S211A7701
F 1½" BSP			PTFE			S207A9901A
F 2" BSP	DEEK		(Teflon®)	1,3	2.9	S210A9901A
F 1½" NPT	PEEK					S208A9901
F 2" NPT			-	1,3	2.9	S211A9901

According to NATO STANAG 3756



- *) Adopted for older models of Emco Wheaton male couplings
- ¹⁾ F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1
- ²⁾ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel
- ³⁾ Standard seal FPM/FKM. Alternative materials, e. g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request.

2" (Ø 70 mm) Hose Unit (Coupler) - Male Thread

Flange ¹⁾	Body	Seal ³⁾	Weiç	ght ≈	Mann Tek
rialiye '	Material ²⁾	aterial ²⁾ O-Ring	kg	lbs	Code No.
2" BSP AG					S278A1101
2" NPT AG	Al				S279A1101
S60 x 6 AG	AI				S2109A1101
W2" - 7 AG		Standard:	1,3	2.1	S2123A1101
2" BSP AG		FPM/FKM			S278A2201
2" NPT AG	Br	(Viton®)			S279A2201
S60x6 AG		Other on			S2109A2201
W2" - 7 AG		request.			S2123A2201
2" BSP AG			2,3	5.1	S278A4401
2" NPT AG	SS				S279A4401
S60x6 AG					S2109A4401

According to NATO STANAG 3756



- ¹⁾ M = Male thread, BSP = EN ISO 228, NPT = ANSI B1.20.1, S 60 x 6 = thread for IBC, W 2" heating oil connection Sweden
- ²⁾ Material: Al = Aluminium, Br = Brass, SS = Stainless Steel
- $^{\scriptscriptstyle 3)}$ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz $^{\scriptscriptstyle 0}$, Kalrez $^{\scriptscriptstyle 0}$, NBR or HNBR on request.

Viton® and Teflon® are registred trademarks of DuPont, DuPont Elastomers.

2" (Ø 70 mm) Coupler - Flanged Inlet

Material** O-Ring kg lbs	Flange ¹⁾	Body	Seal ³⁾	Wei	ght ≈	Mann Tek
Al Section	i lange	Material ²⁾	O-Ring	kg	lbs	Code No.
1½° ASA 150 DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B	undrilled Ø 165 mm					S219A1101
A	DN 40 PN 10/16 Type A					S227A1101
2.* ASA 150 DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 25/40 Type B 2.* ASA 300 DIN 28459 "TW 1' / DN 80 undrilled 0 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B	1½" ASA 150					S255A1101
DIN 28459 "TW 1' / DN 80	DN 50 PN 10/16 Type A	Al		2,3	5.1	S230A1101
Undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B 11/4" ASA 300 DN 50 PN 10/16 Type B DN 40 PN 25/40 Type B 2." ASA 150 DN 28/459 "TW 1" / DN 80 undrilled Ø 165 mm ") DN 40 PN 10/16 Type B ") DN 40 PN 10/16 Type B ") DN 40 PN 10/16 Type B ") DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 25/40 Type B DN 40 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 25/40 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B						S257A1101
DN 40 PN 10/16 Type B	DIN 28459 'TW 1' / DN 80					S265A1101
DN 40 PN 25/40 Type B 11/2" ASA 300	undrilled Ø 165 mm					S219A2201
1½" ASA 150 1½" ASA 300 DN 50 PN 10/16 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 1	DN 40 PN 10/16 Type B					S227A2201
1½" ASA 300 S256A2201 S230A2201 S230A2401 S230A2201 S230A2401 S232A2401 S232A2401 S232A2201 S232A2401 S232A2201 S2	DN 40 PN 25/40 Type B					S228A2201
DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B S230A2201 S230A201 S230A2201 S230A201 S230	1½" ASA 150			5,1	11.2	S255A2201
DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 300 Undrilled Ø 165 mm Ø. Bohrungen Ø 165 mm Ø. Bohrungen Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B DN 40 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/1	1½" ASA 300	GM				S256A2201
2" ASA 300 DIN 28459 TW 1" / DN 80 undrilled Ø 165 mm 0. Bohrungen Ø 165 mm*) DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B The Standard: FPM/FKM (Viton*) S239A4401 S228A4401 S228A401 S228A4401 S228A440		G				S230A2201
S258A2201 S258A2201 S26BA2201 S26BA2401 S26B	DN 50 PN 25/40 Type B					S231A2201
DIN 28459 "TW 1" / DN 80	2" ASA 150			5,1	11.2	S257A2201
undrilled Ø 165 mm S219A4401 0. Bohrungen Ø 165 mm S219A4401F DN 40 PN 10/16 Type B S227A4401 DN 40 PN 10/16 Type B S227A4401 DN 40 PN 25/40 Type B S227A4401 DN 40 PN 25/40 Type B S228A4401 1½" ASA 150 S255A4401 1½" ASA 300 S255A4401 1½" ASA 300 S255A4401 1½" ASA 300 S255A4401 1½" ASA 300 S255A4401 N 50 PN 10/16 Type B S255A4401 N 50 PN 10/16 Type B S230A4401 N 50 PN 10/16 Type B S230A4401 N 50 PN 10/16 Type B S230A4401 N 50 PN 25/40 Type B S230A4401 2" ASA 150 S23A4401 2" ASA 300 S23A4401 10 S2459 TW 1'/ DN 80 Other on request. N 112 S25A4401 S27 ASA 401 S258A4401 S27 ASA 300 S258A4401 N 40 PN 10/16 Type B S258A401 N 40 PN 10/16 Type B S258A601 N 40 PN 25/40 Type B S258A601 1½" ASA 300<						
o. Bohrungen Ø 165 mm S219A4401F DN 40 PN 10/16 Type B S227A4401 DN 40 PN 25/40 Type B S228A4401 1½" ASA 150 S255A4401 1½" ASA 300 S255A4401 1½" ASA 300 S256A4401 0N 50 PN 25/40 Type B S228A4401 DN 50 PN 10/16 Type B S256A4401 DN 50 PN 25/40 Type B S230A4401 DN 50 PN 25/40 Type B *') S230A4401 2" ASA 150 S230A4401 2" ASA 300 S230A4401 5,4 11.9 S230A4401 S230A4401 5,4 11.9 S230A4401 S230A4401 5,4 11.9 S230A4401 S230A4401 6,6 14.6 S256A4401 S230A4401 7,4 11.9 S230A4401 S230A4401 8,4 11.9 S231A4401 S230A4401 9" ASA 150 S23A4401 10 S0 DN 11864 S256A401 10 N 40 PN 10/16 Type B S219A6601 10 N 40 PN 10/16 Type B S225A6601			ļ			
DN 40 PN 10/16 Type B						
DN 40 PN 10/16 Type B **) DN 40 PN 25/40 Type B DN 40 PN 25/40 Type B **) 1½" ASA 150 1½" ASA 300 1½" ASA 300 1½" ASA 300 **) DN 50 PN 10/16 Type B **) DN 50 PN 25/40 Type B **) 2" ASA 150 2" ASA 150 2" ASA 300 2" ASA 300 2" ASA 300 2" ASA 300 1½" ASA 300 1½" ASA 300 1½" ASA 300 2" ASA 300 2" ASA 300 2" ASA 300 3,1 6.8 \$215284401 3,1 6.8 \$25534401F 3,1 6.8 \$2553440	,					
DN 40 PN 25/40 Type B						
DN 40 PN 25/40 Type B **) 1/*						
1½" ASA 150 1½" ASA 300 1½" ASA 150 1½" ASA 300 1½"						
1½" ASA 300 1½"						
1½" ASA 300 1½" ASA 300 ") DN 50 PN 25/40 Type B ") DN 50 PN 10/16 Type B B DN 50 PN 25/40 Type B B DN 50 PN 25/40 Type B B BN 40 PN 25/40 Type B BN 40 PN 25/40 Type B BN 50 PN 25/40 Type B BN 50 PN 25/40 Type B BN 50 PN 25/40 Type B BN 40 PN 25/40 Type B BN 50 PN 10/16 Typ						
1½" ASA 300 **) DN 50 PN 25/40 Type E ') DN 50 PN 10/16 Type B ') DN 50 PN 10/16 Type B ') DN 50 PN 25/40 Type B ') S230A4401 S14.9 S230A401 S14.9	,					
SS S229A4401				0.0	110	
Standard: FPM/FKM (Viton®) S.4 11.9 S.230A4401	,	00		6,6	14.6	
DN 50 PN 10/16 Type B **) DN 50 PN 25/40 Type B DN 50 PN 25/40 Type B **) 2" ASA 150	• • • • • • • • • • • • • • • • • • • •	55		Γ <i>1</i>	11.0	
DN 50 PN 25/40 Type B				5,4	11.9	
DN 50 PN 25/40 Type B **) 2" ASA 150 2" ASA 300 10 DN 50 DN 11864 20 Undrilled Ø 165 mm 20 DN 40 PN 10/16 Type B 2" ASA 300 2" ASA 300 2" ASA 300 20 ASA 300 21 ASA 300 22 ASA 300 23 ASA 300 24 ASA 300 25 ASA 300 26 ASA 300 27 ASA 300 28 ASA 300 29 ASA 300 29 ASA 300 20 ASA 300 20 ASA 300 20 ASA 300 21 ASA 300 21 ASA 300 22 ASA 300 23 ASA 300 24 ASA 300 25 ASA 300 26 ASA 300 27 ASA 300 28 ASA 300 29 ASA 300 20 ASA 300 20 ASA 300 21 ASA 300 21 ASA 300 22 ASA 300 23 ASA 300 24 ASA 300 25 ASA 300 26 ASA 300 27 ASA 300 28 ASA 300 29 ASA 300 20 ASA 300 30 ASZ55A7701 30 ASZ55A9901 31 ASZ55A9901				5 A	11.0	
2" ASA 150 2" ASA 150 **) 2" ASA 300 2" ASA 300 **) DIN 28459 'TW 1' / DN 80 DN 50 DIN 11864 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B			(viton [®])	5,4	11.9	
2" ASA 150 **) 2" ASA 300 2" ASA 300 **) DIN 28459 'TW 1' / DN 80 DN 50 DIN 11864 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 40 PN 25/40 Type B DN 50 PN 25/40 Type B DN 40 PN 25/40 Type B DN 50 PN 25/40 Type B DN 40 PN 25/40 Type B DN 50 PN 25/40 Type B S228A7701 S228A601			Other on	5.1	11 2	
2" ASA 300 2" ASA 300 **) DIN 28459 'TW 1' / DN 80 DN 50 DIN 11864 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B Titan T						
2" ASA 300 **) DIN 28459 'TW 1' / DN 80 DN 50 DIN 11864 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 25/40 Type B EXEMPTION OF B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B			·	٥, ١	11.2	
DIN 28459 'TW 1' / DN 80 DN 50 DIN 11864 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B Titan Titan Titan Titan Titan Titan S255A6601 S230A6601 S230A6601 S230A6601 S231A6601 S255A6601 S231A6601 S230A6601 S230A6601 S230A6601 S255A6601 S230A6601 S255A6601 S255A6601 S257A6601 S255A6601 S255A6601 S255A6601 S255A6601 S255A6601 S255A6601 S255A6601 S255A6601 S255A7001 DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B S255A7701 1½" ASA 300 Hastelloy DN 50 PN 25/40 Type B S255A7701 1½" ASA 300 Undrilled Ø 165 mm DN 40 PN 10/16 Type B S255A7701 Undrilled Ø 165 mm DN 40 PN 10/16 Type B S255A9901 DN 40 PN 10/16 Type B S255A9901 DN 50 PN 10/16 Type B S255A9901 DN 50 PN 10/16 Type B				2.5	5.5	
DN 50 DIN 11864				2,3	5.5	
undrilled Ø 165 mm S219A6601 DN 40 PN 10/16 Type B S227A6601 DN 40 PN 25/40 Type B S228A6601 1½" ASA 150 S255A6601 DN 50 PN 10/16 Type B S230A6601 DN 50 PN 25/40 Type B S231A6601 2" ASA 300 S258A6601 undrilled Ø 165 mm S219A7701 DN 40 PN 10/16 Type B S227A7701 DN 40 PN 25/40 Type B S228A7701 1½" ASA 300 Hastelloy DN 50 PN 10/16 Type B S231A7701 DN 50 PN 25/40 Type B S231A7701 2" ASA 150 S255A7701 2" ASA 300 S258A7701 undrilled Ø 165 mm S257A7701 DN 40 PN 10/16 Type B S258A7701 Undrilled Ø 165 mm S258A7701 DN 40 PN 10/16 Type B S219A9901 5,4 11.9 S227A9901 S255A9901 DN 50 PN 10/16 Type B FEEK				3 1	6.8	
DN 40 PN 10/16 Type B S227A6601 DN 40 PN 25/40 Type B S228A6601 1½" ASA 150 S255A6601 1½" ASA 300 S256A6601 DN 50 PN 10/16 Type B S230A6601 DN 50 PN 25/40 Type B S231A6601 2" ASA 150 S257A6601 2" ASA 300 S258A6601 Undrilled Ø 165 mm DN 40 PN 10/16 Type B S227A7701 DN 40 PN 25/40 Type B S228A7701 1½" ASA 300 S258A7701 1½" ASA 300 S256A7701 1½" ASA 300 S256A7701 DN 50 PN 10/16 Type B S231A7701 DN 50 PN 25/40 Type B S231A7701 DN 50 PN 25/40 Type B S231A7701 DN 50 PN 25/40 Type B S231A7701 DN 50 PN 10/16 Type B S257A7701 2" ASA 150 S258A7701 Undrilled Ø 165 mm S219A9901 DN 40 PN 10/16 Type B FEK S255A9901 DN 50 PN 10/16 Type B 5,4 11.9 S230A9901 DN 50 PN 10/16 Type B 5,4 11.9 S230A9901 DN 50 PN 10/16 Type B FEK S255A9901 DN 50 PN 10/16 Type B 5,4 11.9 S230A9901 DN 50 PN 10/16 Type B FEK S255A9901 DN 50 PN 10/16 Type B 5,4 11.9 S230A990				0,1	0.0	
DN 40 PN 25/40 Type B S228A6601 1½" ASA 150 S255A6601 1½" ASA 300 S256A6601 DN 50 PN 10/16 Type B S230A6601 2" ASA 150 S257A6601 2" ASA 300 S258A6601 2" ASA 300 S258A6601 2" ASA 300 S258A6601 DN 40 PN 10/16 Type B S227A7701 DN 40 PN 25/40 Type B S228A7701 1½" ASA 300 S258A7701 1½" ASA 300 S256A7701 DN 50 PN 10/16 Type B S231A7701 DN 50 PN 25/40 Type B S231A7701 2" ASA 150 S257A701 2" ASA 300 S258A7701 3						
1½" ASA 150 S255A6601 1½" ASA 300 Titan DN 50 PN 10/16 Type B S230A6601 DN 50 PN 25/40 Type B S231A6601 2" ASA 300 S258A6601 undrilled Ø 165 mm S219A7701 DN 40 PN 10/16 Type B S227A7701 DN 40 PN 25/40 Type B S228A7701 1½" ASA 300 S256A7701 DN 50 PN 10/16 Type B S230A7701 DN 50 PN 25/40 Type B S231A7701 2" ASA 150 S257A7701 2" ASA 300 S258A7701 undrilled Ø 165 mm S257A7701 DN 40 PN 10/16 Type B S257A7701 DN 40 PN 10/16 Type B S259A9901 DN 50 PN 10/16 Type B 5,4 11.9 S230A9901 DN 50 PN 10/16 Type B 5,4 11.9 S230A9901						
Titan DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 150 2" ASA 300 Undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 40 PN 25/40 Type B DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B						
DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 150 2" ASA 300 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 50 PN 25/40 Type B DN 40 PN 25/40 Type B 1½" ASA 300 Hastelloy Hastelloy DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B S230A7701 S255A7701 S257A7701 S257A7701 S257A7701 S258A7701 DN 40 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B 5,4 11.9 S227A9901 DN 50 PN 10/16 Type B 5,4 11.9 S230A9901		Titan				
DN 50 PN 25/40 Type B 2" ASA 150 2" ASA 300 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B 1½" ASA 300 Hastelloy DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 300 DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 300 Undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B						
2" ASA 150 2" ASA 300 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B 1½" ASA 300 Hastelloy DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 300 Undrilled Ø 165 mm DN 40 PN 25/40 Type B DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 300 Undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B Ty²" ASA 150 Type B DN 50 PN 10/16 Type B Ty²" ASA 150 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B Ty²" ASA 150 Type B DN 50 PN 10/16 Type B						
2" ASA 300 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B 1½" ASA 150 1½" ASA 300 DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 150 2" ASA 150 2" ASA 300 DN 50 PN 25/40 Type B DN 50 PN 25/40 Type B DN 50 PN 25/40 Type B 2" ASA 300 1" ASA 300 2" ASA 300 DN 40 PN 10/16 Type B DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B 5,4 11.9 \$227A9901 Ty₂" ASA 150 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B	, ·					
undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B 1½" ASA 150 1½" ASA 300 DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 150 2" ASA 300 Undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B 1½" ASA 300 PEEK PEEK S219A7701 S228A7701 S256A7701 5,4 11.9 S230A7701 S258A7701 S219A9901 5,4 11.9 S227A9901 5,4 11.9 S227A9901 5,4 11.9 S227A9901 5,4 11.9 S230A9901						
DN 40 PN 10/16 Type B DN 40 PN 25/40 Type B 1½" ASA 150 1½" ASA 300 DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 150 2" ASA 300 Undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B PEEK PEEK S227A7701 S228A7701 S255A7701 S255A7701 5,4 11.9 S230A7701 S231A7701 S257A7701 S219A9901 5,4 11.9 S227A9901 5,4 11.9 S227A9901 5,4 11.9 S230A9901						
DN 40 PN 25/40 Type B \$228A7701 1½" ASA 150 \$255A7701 1½" ASA 300 \$256A7701 DN 50 PN 10/16 Type B 5,4 11.9 \$230A7701 2" ASA 150 \$257A7701 2" ASA 300 \$258A7701 undrilled Ø 165 mm \$219A9901 DN 40 PN 10/16 Type B 5,4 11.9 \$227A9901 1½" ASA 150 Type B 5,4 11.9 \$230A9901 DN 50 PN 10/16 Type B 5,4 11.9 \$230A9901						S227A7701
1½" ASA 150 1½" ASA 300 DN 50 PN 10/16 Type B DN 50 PN 25/40 Type B 2" ASA 150 2" ASA 300 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B EXEMPTED PEEK PEEK S255A7701 S255A7701 S230A7701 S231A7701 S257A7701 S219A9901 5,4 11.9 S227A9901 5,4 11.9 S227A9901 5,4 11.9 S230A9901						
1½" ASA 300 Hastelloy DN 50 PN 10/16 Type B 5,4 11.9 \$230A7701 DN 50 PN 25/40 Type B \$231A7701 2" ASA 150 \$257A7701 2" ASA 300 \$258A7701 undrilled Ø 165 mm \$219A9901 DN 40 PN 10/16 Type B 5,4 11.9 \$227A9901 DN 50 PN 10/16 Type B 5,4 11.9 \$230A9901	•					
DN 50 PN 10/16 Type B 5,4 11.9 \$230A7701 DN 50 PN 25/40 Type B \$231A7701 \$231A7701 2" ASA 150 \$257A7701 \$258A7701 undrilled Ø 165 mm \$219A9901 \$219A9901 DN 40 PN 10/16 Type B 5,4 11.9 \$227A9901 DN 50 PN 10/16 Type B 5,4 11.9 \$230A9901		Hastelloy				
DN 50 PN 25/40 Type B 2" ASA 150 2" ASA 300 undrilled Ø 165 mm DN 40 PN 10/16 Type B DN 50 PN 10/16 Type B DN 50 PN 10/16 Type B S231A7701 S258A7701 S219A9901 5,4 11.9 S227A9901 5,4 11.9 S230A9901		_		5,4	11.9	
2" ASA 150 2" ASA 300 S258A7701 Undrilled Ø 165 mm DN 40 PN 10/16 Type B 1½" ASA 150 Type B DN 50 PN 10/16 Type B 5,4 11.9 S230A9901 5,4 11.9 S230A9901						
2" ASA 300 S258A7701 undrilled Ø 165 mm S219A9901 DN 40 PN 10/16 Type B 5,4 11.9 S227A9901 1½" ASA 150 Type B S255A9901 DN 50 PN 10/16 Type B 5,4 11.9 S230A9901						
undrilled Ø 165 mm S219A9901 DN 40 PN 10/16 Type B 5,4 11.9 \$227A9901 1½" ASA 150 Type B \$255A9901 DN 50 PN 10/16 Type B 5,4 11.9 \$230A9901						
DN 40 PN 10/16 Type B 5,4 11.9 \$227A9901 1½" ASA 150 Type B \$255A9901 DN 50 PN 10/16 Type B 5,4 11.9 \$230A9901]			S219A9901
1½" ASA 150 Type B PEEK DN 50 PN 10/16 Type B 5,4 11.9 \$230A9901				5,4	11.9	
DN 50 PN 10/16 Type B 5,4 11.9 \$230A9901		PEEK				
				5,4	11.9	S230A9901
	2" ASA 150					S257A9901

According to NATO STANAG 3756



^{*)} Type E (with spigot), EN 1092-1, see page 44

^{**)} Flange with standard thickness

PN 10/16/25/40 = EN 1092 (types see page 44),
 ASA = ANSI B16.5 (150 o. 300 psi),
 DIN 28459 = old standard TW, 10 bar.
 DIN 11864 = DIN 11864-2 (aseptic flange).

²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request.

2½" (Ø 105 mm) Technical Information

Tank Unit (Adapter) and Hose Unit (Coupler)



According to NATO STANAG 3756

Material	Maximum Working Pressure	Test Pressure	Minimum Burst Pressure
Aluminium	10 bar / 145 psi	15 bar / 218 psi	50 bar / 726 psi
Brass/Gunmetal	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi
Stainless Steel	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
Titan	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
Hastelloy	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
PEEK	6 bar / 87 psi	9 bar / 131 psi	30 bar / 435 psi

Connections

21/2" and 3" in BSP, NPT and flanged inlet.

Applications

For road and rail tanker bottom loading/unloading, tanks and containers, or on any application where product contamination and spillage needs to be minimized.

Media

Petroleum products: gasoline, diesel, oil etc.
Chemical products: ethylene oxide, propylene oxide, acrylonitrile, butadiene, ammonia, vinyl chloride, toluene, xylene, sulphuric acid, phenol etc.
Gas: vapor recovery/balance systems forfor various media.

Dry powder

Material of Body

Aluminium, brass/gunmetal, stainless steel, Hastelloy and PEEK. Other materials on request.

Seals

Standard seals in FPM (Viton®), EPDM, Chemraz®, Kalrez®, NBR. Other materials on request.

High Flow Rates / Low Pressure Drop

Allows maximum product transfer with minimal losses.

Recommended Maximum Flow Rates

1500 litres/minute (fuel)

Selectivity

- avoid mixing products

To avoid product contamination caused by connecting a hose unit to the wrong tank unit, selective versions of the hose and tank units are available.

Each unit has a number of selective positions, designated by a coded part number according to the coupling size – specify when placing order. See page 32 ff.

Interchangeability

Compatible with couplings of other manufacturers.

Hose Unit with Integrated Swivel

All hose units are supplied with an integrated swivel.

ООО «ТИ-СИСТЕМС» ИНЖИНИРИНГ И ПОСТАВКА ТЕХНОЛОГИЧЕСКОГО ОБОРУДОВАНИЯ

21/2" (Ø 105 mm) DDCouplings

21/2" (Ø 105 mm) Tank Unit (Adapter) - Female Thread

Connection 1)	Body		Seal		ght ≈	Mann Tek	
Inch/DN	Material ²⁾	O-Ring ³⁾	Thread Seal	kg	lbs	Code No.	
F 2½" BSP			PUR	1,0	2.2	T312D1101B	
F 3" BSP	Al		(Polyurethane)	1,0	2.2	T314D1101B	
F 2½" NPT	AI			1,0	2.2	T313D1101	
F 3" NPT			_	1,1	2.4	T315D1101	
F 21/2" BSP			PUR	2,7	6.0	T312D2201B	
F 3" BSP	GM		(Polyurethane)	2,9	6.4	T314D2201B	
F 2½" NPT	GIVI			2,9	6.4	T313D2201	
F 3" NPT		Otto and a state		3,2	7.1	T315D2201	
F 2½" BSP		Standard: FPM/FKM	PTFE	2,5	5.5	T312B4401A	
F 3" BSP	SS	(Viton®)	(Teflon®)	3,1	6.8	T314B4401A	
F 2½" NPT	33			2,7	6.0	T313B4401	
F 3" NPT		Other on request.	_	3,7	8.2	T315B4401	
F 2½" BSP		request.	PTFE	2,6	5.7	T312A7701A	
F 3" BSP	Hastelloy		(Teflon®)			T314A7701A	
F 2½" NPT	паѕіеноў					T313A7701	
F 3" NPT			_			T315A7701	
F 2½" BSP			PTFE			T312A9901A	
F 3" BSP	PEEK		(Teflon®)			T314A9901A	
F 2½" NPT	FEEN					T313A9901	
F 3" NPT			_			T315A9901	

According to NATO STANAG 3756



- ¹⁾ F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1
- 2) Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- ³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request.

Viton® and Teflon® are registred trademarks of DuPont, DuPont Elastomers.

2½" (Ø 105 mm) Tank Unit (Adapter) – Male Thread

Connection 1)	Body	Seal ³⁾	Weig	ght ≈	Mann Tek
Inch/DN	Material ²⁾	O-Ring	kg	lbs	Code No.
2½" BSP			1,0	2.2	T380A1101
3" BSP	Al				T382A1101
2½" NPT	Al				T381A1101
3" NPT		Ota a dand.			T383A1101
2½" BSP		Standard: FPM/FKM (Viton®)			T380A2201
3" BSP	GM				T382A2201
2½" NPT	GIVI				T381A2201
3" NPT		Other on			T383A2201
2½" BSP		request.			T380A4401
3" BSP	ee.				T382A4401
2½" NPT	SS				T381A4401
3" NPT					T383A4401

According to NATO STANAG 3756



Viton® and Teflon® are registred trademarks of DuPont, DuPont Elastomers.

¹⁾ M = Male thread, BSP = EN ISO 228, NPT = ANSI B1.20.1

²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request.

21/2" (Ø 105 mm) Tank Unit (Adapter) - Flanged Inlet

Flange ¹⁾	Body	Seal ³⁾	Weig	ght ≈	Mann Tek
· iango	Material ²⁾	O-Ring	kg	lbs	Code No.
undrilled Ø 210 mm			2,1	4.6	T320D1101
DN 65 PN 10/16 Type A			1,6	3.5	T333D1101
DN 80 PN 10/16 Type A			1,8	4.0	T336D1101
2½" ASA 150			1,7	3.8	T359D1101
3" ASA 150	Al		1,8	4.0	T361D1101
DIN 28459 'TW 1' / DN 80			1,3	2.9	T365D1101
DIN 28459 'TW 3' / DN 100			1,7	3.8	T366D1101
3" TTMA			1,4	3.1	T367D1101
4" TTMA			1,5	3.3	T368D1101
undrilled Ø 210 mm			6,2	13.7	T320D2201
DN 65 PN 10/16 Type B			4,9	10.8	T333D2201
DN 65 PN 25/40 Type B					T334D2201
DN 80 PN 10/16 Type B					T336D2201
DN 80 PN 25/40 Type B					T337D2201
2½" ASA 150			4,4	9.7	T359D2201
2½" ASA 300	GM				T360D2201
3" ASA 150			4,4	9.7	T361D2201
3" ASA 300					T362D2201
DIN 28459 'TW 1' / DN 80			4,4	9.7	T365D2201
DIN 28459 'TW 3' / DN 100		Ct and and			T366D2201
3" TTMA		Standard:			T367D2201
4" TTMA		FPM/FKM	4,2	9.3	T368D2201
undrilled Ø 210 mm		(Viton®)			T320B4401
o. Bohrungen Ø 210 mm **)					T320B4401F
DN 65 PN 25/40 Type E *)		Other on			T332B4401
DN 65 PN 10/16 Type B		request.	4,2	9.3	T333B4401
DN 65 PN 10/16 Type B **)		'			T333B4401F
DN 65 PN 25/40 Type B			4,3	9.5	T334B4401
DN 65 PN 25/40 Type B **)			4,3	9.5	T334B4401F
DN 80 PN 10/16 Type E *)					T335B4401
DN 80 PN 10/16 Type B			4,7	10.4	T336B4401
DN 80 PN 10/16 Type B **)					T336B4401F
DN 80 PN 25/40 Type B					T337B4401
DN 80 PN 25/40 Type B **)	SS				T337B4401F
2½" ASA 150			4,0	8.8	T359B4401
2½" ASA 150 **)					T359B4401F
2½" ASA 300			4,5	9.9	T360B4401
2½" ASA 300 **)			4,5	9.9	T360B4401F
3" ASA 150			4,5	9.9	T361B4401
3" ASA 150 **)					T361B4401F
3" ASA 300					T362B4401
3" ASA 300 **)					T362B4401F
DIN 28459 'TW 1' / DN 80					T365B4401
DIN 28459 'TW 3' / DN 100					T366B4401
3" TTMA					T367B4401
4" TTMA					T368B4401

According to NATO STANAG 3756




- *) Type E (with spigot), EN 1092-1, see page 44
- **) Flange with standard thickness
- 1) PN 10/16/25/40 = EN 1092 (types see page 44), ASA = ANSI B16.5 (150 o. 300 psi), DIN 28459 = old standard TW, 10 bar. TTMA = Standard of the Truck Trailer Manufacturers Association
- ²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- 3) Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request.

Viton® is a registred trademark of DuPont, DuPont Elastomers.

2½" (Ø 105 mm) Tank Unit (Adapter) with Square Flange Connection

Elongo 1)	Body	Body		ght ≈	Mann lek	
Flange ¹⁾	Material ²⁾	O-Ring	kg	lbs	Code No.	
Normec (120 x 120 mm)	Al	Standard: FPM/FKM			T3107D1101	
Normec (120 x 120 mm)	GM	(Viton®)			T3107D2201	

According to NATO STANAG 3756



¹⁾ Normec = with drilling for Italian road tanker connection

²⁾ Material: Al = Aluminium, GM = Gunmetal

Standarddichtung FPM/FKM. Alternative Materialien, z. B. EPDM, Chemraz®, Kalrez®, NBR oder HNBR auf Anfrage

21/2" (Ø 105 mm) Hose Unit (Coupler) - Female Thread

Connection 1)	Body	Se	Seal N O-Ring ³⁾ Thread Seal		ght ≈	Mann Tek
Inch/DN	Material ²⁾	O-Ring ³⁾			lbs	Code No.
F 21/2" BSP			PUR	3,3	7.3	S312B1101B
F 3" BSP	AI		(Polyurethan)	3,6	7.9	S314B1101B
F 2½" NPT	AI		_	3,4	7.5	S313B1101
F 3" NPT			_	3,5	7.7	S315B1101
F 2½" BSP			PUR	7,3	16.1	S312B2201B
F 3" BSP	GM	(Polyurethan)	7,4	16.3	S314B2201B	
F 2½" NPT	CIVI	Standard: -			S313B2201	
F 3" NPT			_	7,6	16.8	S315B2201
F 2½" BSP		FPM/FKM	PTFE	6,7	14.8	S312B4401A
F 3" BSP	SS	(Viton®)	6,6	14.6	S314B4401A	
F 2½" NPT	33		_	6,6	14.6	S313B4401
F 3" NPT		Other on	_	6,6	14.6	S315B4401
F 21/2" BSP		request.	PTFE	6,8	15.0	S312A7701A
F 3" BSP	Hastelloy	roquoot.	FILE			S314A7701A
F 2½" NPT	Tiastelloy		_			S313A7701
F 3" NPT			_			S315A7701
F 2½" BSP			PTFE			S312A9901A
F 3" BSP	PEEK	FIFE			S314A9901A	
F 2½" NPT	FEEN					S313A9901
F 3" NPT			_			S315A9901

According to NATO STANAG 3756



21/2" (Ø 105 mm) Coupler - Flanged Inlet

FI 18)	Body	Seal ³⁾	Weig	ght ≈	Mann Tek
Flange ^{1B)}	Material ²⁾	O-Ring	kg	lbs	Code No.
undrilled Ø 210 mm					S320B1101
DN 65 PN 10/16 Type A			10,0	22.1	S333B1101
DN 80 PN 10/16 Type A					S336B1101
2" ASA 150					S357B1101
2½" ASA 150					S359B1101
3" ASA 150	Al				S361B1101
DIN 28459 'TW 1' / DN 80					S365B1101
DIN 28459 'TW 3' / DN 100)				S366B1101
3" TTMA	_				S367B1101
4" TTMA					S368B1101
undrilled Ø 210 mm					S320B2201
DN 65 PN 10/16 Type B					S333B2201
DN 65 PN 25/40 Type B	7				S334B2201
DN 80 PN 10/16 Type B					S336B2201
DN 80 PN 25/40 Type B					S337B2201
2" ASA 150					S357B2201
2½" ASA 150					S359B2201
2½" ASA 300	GM				S360B2201
3" ASA 150					S361B2201
3" ASA 300					S362B2201
DIN 28459 'TW 1' / DN 80	<u> </u>				S365B2201
DIN 28459 'TW 3' / DN 100)	Standard:			S366B2201
3" TTMA 4" TTMA		FPM/FKM			S367B2201
					S368B2201
undrilled Ø 210 mm		(Viton®)			S320B4401
undrilled Ø 210 mm**)					S320B4401F
DN 65 PN 25/40 Type E*)		Other on	10.0	00.4	S332B4401
DN 65 PN 10/16 Type B		request.	10,0	22.1	S333B4401
DN 65 PN 10/16 Type B**					S333B4401F
DN 65 PN 25/40 Type B					S334B4401
DN 65 PN 25/40 Type B**					S334B4401F
DN 80 PN 10/16 Type E*)					S335B4401
DN 80 PN 10/16 Type B	_				S336B4401
DN 80 PN 10/16 Type B**					S336B4401F
DN 80 PN 25/40 Type B	_				S337B4401
DN 80 PN 25/40 Type B**					S337B4401F
2" ASA 150	SS				S357B4401
2" ASA 150**)					S357B4401F
2½" ASA 150			6,6	14.6	
2½" ASA 150**)			6,6	14.6	S359B4401F
2½" ASA 300					S360B4401
2½" ASA 300**)					S360B4401F
3" ASA 150					S361B4401
3" ASA 150**)					S361B4401F
3" ASA 300					S362B4401
3" ASA 300**)					S362B4401F
DIN 28459 'TW 1' / DN 80					S365B4401
DIN 28459 'TW 3' / DN 100)				S366B4401
3" TTMA					S367B4401
4" TTMA	_				S368B4401

According to NATO STANAG 3756



- *) Type E (with spigot), EN 1092-1, see page 44
- **) Flange with standard thickness
- ^{1A)} F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1
- (types see page 44),
 ASA = ANSI B16.5 (150 o. 300 psi),
 DIN 28459 = old standard TW, 10 bar.
 TTMA = Truck Trailer Manufacturers Association
- ²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- 3) Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request

Viton® and Teflon® are registred trademarks of DuPont, DuPont Elastomers.

3" (Ø 119 mm) Technical Information

Tank Unit (Adapter) and Hose Unit (Coupler)



According to NATO STANAG 3756

Material	Maximum Working Pressure	Test Pressure	Minimum Burst Pressure
Aluminium	10 bar / 145 psi	15 bar / 218 psi	50 bar / 726 psi
Brass/Gunmetal	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi
Stainless Steel	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
Titan	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
Hastelloy	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi
PEEK	6 bar / 87 psi	9 bar / 131 psi	30 bar / 435 psi

Connections

3" in BSP, NPT and flanged inlet.

Applications

For road, rail tanker loading/unloading, filling of tanks and containers, refuelling and loading/unloading bunker boats (marine tankers) and small ships.

Also suitable for other applications where high loading rates are required and product contamination and spillage needs to be minimized.

Media

Petroleum products: gasoline, diesel, oil etc. **Chemical products**: ethylene oxide,

propylene oxide, acrylonitrile, butadiene, ammonia, vinyl chloride, toluene, xylene, sulphuric acid, phenol etc.

Gas: vapor recovery/balance systems

Dry powder.

Material of Body

Aluminium, brass/gunmetal, stainless steel, Hastelloy and PEEK. Other materials on request.

Seals

Standard seals FPM (Viton®), EPDM, FFKM (Chemraz®, Kalrez®), NBR. Other on request.

High Flow Rates / Low Pressure DropAllows maximum product transfer with minimal losses.

Recommended Maximum Flow Rates 2000 litres/minute (fuel)

Selectivity

- avoid mixing products

To avoid product contamination caused by connecting a hose unit to the wrong tank unit, selective versions of the hose and tank units are available.

Each unit has a number of selective positions, designated by a coded part number according to the coupling size – specify when placing order.

Interchangeability

Compatible with couplings of other manufacturers.

Hose Unit with Integrated Swivel

All hose units are supplied with an integrated swivel.

3" (Ø 119 mm) Tank Unit (Adapter) - Female Thread

Connection 1)	Body		Seal		ght ≈	Mann Tek
Inch/DN	Material ²⁾	O-Ring ³⁾	Thread Seal	kg	lbs	Code No.
F 3" BSP			PUR	1,2	2.7	T414D1101B
F 3" BSP	Al		PUN	1,3	2.9	T414K1101B*)
F 3" NPT				1,2	2.7	T415D1101
F 3" BSP	GM		PUR	3,2	7.1	T414D2201B
F 3" NPT		Standard:		3,5	7.7	T415D2201
F 3" BSP	Br	FPM/FKM	PUR	1,3	2.9	T414K2201B*)
F 3" BSP	SS	(Viton®)	PTFE	3,1	6.8	T414B4401A
F 3" NPT	55	Other on		3,4	7.5	T415B4401
F 3" BSP		request.	PTFE			T414A7701A
F 3" NPT	Hastelloy	request.				T415A7701
F 3" BSP	PVDF/Hastelloy		PTFE	3,6	7.9	T414A8701A
F 3" BSP	DEEK		PTFE			T414A9901A
F 3" NPT	PEEK					T415A9901


According to NATO STANAG 3756



3" (Ø 119 mm) Tank Unit (Adapter)- Flanged Inlet

Flange ^{1B)}	Body	Seal ³⁾	Weig	ght ≈	Mann Tek
i lalige	Material ²⁾	O-Ring	kg	lbs	Code No.
undrilled Ø 210 mm			2,0	4.4	T420D1101
DN 65 PN 10 / 16 Type A	1				T433D1101
DN 80 PN 10/16 Type A			2,0	4.4	T436D1101
3" ASA 150	Al		1,8	4.0	T461D1101
DIN 28459 'TW 1' / DN 80	AI		1,4	3.1	T465D1101
DIN 28459 'TW 3' / DN 100	1		1,6	3.5	T466D1101
3" TTMA			1,8	4.0	T467D1101
4" TTMA			1,5	3.3	T468D1101
undrilled Ø 210 mm			6,2	13.7	T320D2201
DN 65 PN 10/16 Type B	1		4,9	10.8	T433D2201
DN 65 PN 25/40 Type B	1				T434D2201
DN 80 PN 10/16 Type B			5,2	11.5	T436D2201
DN 80 PN 25/40 Type B	1				T437D2201
3" ASA 150	GM		4,9	10.8	T461D2201
3" ASA 300					T462D2201
DIN 28459 'TW 1' / DN 80	1		4,1	9.0	T465D2201
DIN 28459 'TW 3' / DN 100			4,7	10.4	T466D2201
3" TTMA					T467D2201
4" TTMA			4,6	10.1	T468D2201
undrilled Ø 210 mm		Standard:			T420B4401
undrilled Ø 210 mm***)		FPM/FKM			T420B4401F
DN 65 PN 10/16 Type B		(Viton®)			T433B4401
DN 65 PN 10/16 Type B***)		Other on			T433B4401F
DN 65 PN 25/40 Type B		request.			T434B4401
DN 65 PN 25/40 Type B***)	1	request.			T434B4401F
DN 80 PN 25/40 Type E**)					T435B4401F
DN 80 PN 10/16 Type B			5,1	11.2	T436B4401
DN 80 PN 10/16 Type B***)	1				T436B4401F
DN 80 PN 25/40 Type B	SS		5,1	11.2	T437B4401
DN 80 PN 25/40 Type B***)					T437B4401F
3" ASA 150			4,9	10.8	T461B4401
3" ASA 150***)	1			14.1	T461B4401F
3" ASA 300			4,9	10.8	T462B4401
3" ASA 300***)	1				T462B4401F
DIN 28459 'TW 1' / DN 80			3,9	8.6	T465B4401
DIN 28459 'TW 3' / DN 100	1		,		T466B4401
3" TTMA					T467B4401
4" TTMA	1				T468B4401
undrilled Ø 210 mm		1			T420A9901
	1				T436A9901
DN 80 PN 10/16 Type B	-				
3" ASA 150	PEEK				T461A9901
	PEEK				T467A9901

According to NATO STANAG 3756




- *) shortened version for tight installation
- **) Type E (with spigot), EN 1092-1, see page 44
- ***) Flange with standard thickness
- ^{1A)} F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1
- (types see page 44),
 ASA = ANSI B16.5 (150 o. 300 psi),
 DIN 28459 = old standard TW, 10 bar.
 TTMA = Truck Trailer Manufacturers Association
- ²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- ³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request

3" (Ø 119 mm) DDCouplings

3" (Ø 119 mm) Dropped Tank Unit (Adapter) with Flange Connection

Flange ¹⁾	Body	Seal ³⁾	Weight ≈		Mann Tek
	Material ²⁾	O-Ring	kg	lbs	Code No.
DIN 28459 'TW 1' / DN 80		Standard: FPM/FKM (Viton®) Other on request.	1,6	3.5	T465I1101
DIN 28459 'TW 3' / DN 100	Al		1,6	3.5	T466I1101
3" TTMA	AI				T467l1101
4" TTMA					T468I1101

According to NATO STANAG 3756



15° dropped Tank unit with flange connection makes it easier to connect when installed in high position and reduces hose wear.


- 1) DIN 28459 = old standard TW, 10 bar. TTMA = Truck Trailer Manufacturers Association
- 2) Material: Al = Aluminium
- ³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request

Viton® is a registred trademark of DuPont, DuPont Elastomers.

3" (Ø 119 mm) Tank Unit (Adapter) with Square Flange Connection

Flange ¹⁾	Body	Seal ³⁾	Wei	ght ≈	Mann Tek
	Material ²⁾	O-Ring	kg	lbs	Code No.
Normec (120x120 mm)	Al	Standard: FPM/FKM			T4107D1101
Normec (120x120 mm)	GM	(Viton®)			T4107D2201

According to NATO STANAG 3756



¹⁾ Normec = with drilling for Italian road tanker connection

²⁾ Material: Al = Aluminium, GM = Gunmetal

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request

3" (Ø 119 mm) Hose Unit (Coupler) - Female Thread

Connection 1)	Body	Se	Seal ³⁾		ght ≈	Mann Tek	
Inch/DN	Material ²⁾	O-Ring	Thread Seal	kg	lbs	Code No.	
F 3" BSP	Al		PUR	3,8	8.4	S414B1101B	
F 3" NPT	Ai		_	3,9	8.6	S415B1101	
F 3" BSP	GM		PUR	8,4	18.5	S414B2201B	
F 3" NPT	GIVI	Standard:	_	9,0	19.8	S415B2201	
F 3" BSP	SS	FPM/FKM	PTFE	8,4	18.5	S414B4401A	
F 3" NPT	33	(Viton®)	_	8,7	19.2	S415B4401	
F 3" BSP	Hastelloy	Other on	PTFE			S414A7701B	
F 3" NPT	паѕіеноў	request.	_	8,1	17.7	S415A7701	
F 3" BSP	PVDF/Hastelloy		PTFE			S414A8701B	
F 3" BSP	PEEK		PTFE			S414A9901B	
F 3" NPT	PEEN		_			S415A9901	

According to NATO STANAG 3756



- 1) F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1
- ²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- ³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request

3" (Ø 119 mm) Coupler - Flanged Inlet

Flower 1)	Body	Seal ³⁾	Weig	ght ≈	Mann Tek
Flange ¹⁾	Material ²⁾		kg	lbs	Code No.
undrilled Ø 210 mm					S420B1101
DN 80 PN 10 / 16 Type A					S436B1101
3" ASA 150			5,5	12.1	S461B1101
DIN 28459 'TW 1' / DN 80	Al				S465B1101
DIN 28459 'TW 3' / DN 100					S466B1101
3" TTMA					S467B1101
4" TTMA			5,5	12.1	S468B1101
undrilled Ø 210 mm					S320B2201
DN 80 PN 10/16 Type B					S436B2201
DN 80 PN 25/40 Type B					S437B2201
3" ASA 150					S461B2201
3" ASA 300	GM				S462B2201
DIN 28459 'TW 1' / DN 80					S465B2201
DIN 28459 'TW 3' / DN 100					S466B2201
3" TTMA		0			S467B2201
4" TTMA		Standard: FPM/FKM			S468B2201
undrilled Ø 210 mm		(Viton®)			S420B4401
o. Bohrungen Ø 210 mm**)					S420B4401F
DN 80 PN 10/ 6 Type B		Other on request.	12,7	28.0	S436B4401
DN 80 PN 10/16 Type B**)		request.			S436B4401F
DN 80 PN 25/40 Type B					S437B4401
DN 80 PN 25/40 Type B**)					S437B4401F
DN 80 PN 25/40 Type E					S435B4401F
3" ASA 150	SS		13,2	29.1	S461B4401
3" ASA 150**)			13,2	29.1	S461B4401F
3" ASA 300					S462B4401
3" ASA 300**)			14,6	32.2	S462B4401F
DIN 28459 'TW 1' / DN 80					S465B4401
DIN 28459 'TW 3' / DN 100					S466B4401
3" TTMA					S467B4401
4" TTMA					S468B4401
undrilled Ø 210 mm					S420B9901
DN 80 PN 10/16 Type B	PEEK				S436B9901
3" ASA 150					S461B9901

According to NATO STANAG 3756



- *) Type E (with spigot), EN 1092-1, see page 44
- **) Flange with standard thickness
- PN 10/16/25/40 = EN 1092 (types see page 44),
 ASA = ANSI B16.5 (150 o. 300 psi),
 DIN 28459 = old standard TW, 10 bar.
 TTMA = Truck Trailer Manufacturers Association
- ²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- 3) Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request

Viton® and Teflon® are registred trademarks of DuPont, DuPont Elastomers.

4" (Ø 164 mm) Technical Information

Tank Unit (Adapter) and Hose Unit (Coupler)



According to NATO STANAG 3756

Material	Maximum Working Pressure	Test Pressure	Minimum Burst Pressure
Aluminium	16 bar / 232 psi	15 bar / 218 psi	50 bar / 726 psi
Brass/Gunmetal	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi
Stainless Steel	25 bar / 363 psi	37,5 bar / 544 psi	125 bar / 1813 psi

Connections

4" in BSP, NPT and flanged inlet.

Applications

Recommended for HiFlo-loading/unloading of rail tankers, aviation refuellers and road tankers. Also suitable for ship to shore transfer, ship to ship transfer and ship to rig transfer or on any application where spillage needs to be minimized.

Media

Petroleum products: gasoline, diesel, oil etc.
Chemical products: ethylene oxide, propylene oxide, acrylonitrile, butadiene, ammonia, vinyl chloride, toluene, xylene, sulphuric acid, phenol etc.
Gas: vapor recovery/balance systems forfor various media.

Dry powder

Material of Body

Aluminium, brass/gunmetal, stainless steel, Hastelloy and PEEK. Other materials on request.

Seals

StandardSeals FPM (Viton®), EPDM, FFKM (Chemraz®, Kalrez®), NBR. Other on request.

High Flow Rates / Low Pressure Drop

Allows maximum product transfer with minimal losses

Recommended Maximum Flow Rates 3500 litres/minute (fuel)

Selectivity

- avoid mixing products

To avoid product contamination caused by connecting a hose unit to the wrong tank unit, selective versions of the hose and tank units are available.

Each unit has a number of selective positions, designated by a coded part number according to the coupling size – specify when placing order. See page 32 ff.

Interchangeability

Compatible with couplings of other manufacturers.

Hose Unit with Integrated Swivel

All hose units are supplied with an integrated swivel.

4" (Ø 164 mm) DDCouplings

4" (Ø 164 mm) Tank Unit (Adapter) - Female Thread

Connection 1)	Body	Se	al ³⁾	Weight ≈		Mann Tek	
Inch/DN	Material ²⁾	O-Ring	Thread Seal	kg	lbs	Code No.	
F 4" BSP	Al		PUR	2,5	5.5	T516A1101B	
F 4" NPT	AI	Standard:	_	2,8	6.2	T517A1101	
F 4" BSP	GM	FPM/FKM (Viton®)	PUR	7,0	15.4	T516D2201B	
F 4" NPT	GIVI	Other on	_	7,7	17.0	T517D2201	
F 4" BSP	ss	request.	PTFE	6,0	13.2	T516B4401A	
F 4" NPT	33		_	6,4	14.1	T517B4401	

According to NATO STANAG 3756



- $^{1)}$ F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1
- ²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- ⁹ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request

Viton® is a registred trademark of DuPont, DuPont Elastomers.

4" (Ø 164 mm) Tank Unit (Adapter)- Flanged Inlet

Flores 1)	Body	Seal ³⁾	Wei	ght ≈	Mann Tek
Flange ¹⁾	Material ²⁾	O-Ring	kg	lbs	Code No.
undrilled Ø 230 mm			3,2	7.1	T521D1101
DN 100 PN 10/16 Type B			3,1	6.8	T539D1101
4" ASA 150	Al		3,2	7.1	T563D1101
DIN 28459 'TW 3' / DN 100			2,6	5.7	T566D1101
4" TTMA			2,6	5.7	T568D1101
undrilled Ø 230 mm					T521D2201
DN 100 PN 10/16 Type B					T539D2201
DN 100 PN 25/40 Type B					T540D2201
4" ASA 150	GM				T563D2201
4" ASA 300 psi		Standard:			T564D2201
DIN 28459 'TW 3' / DN 100					T566D2201
4" TTMA		FPM/FKM			T568D2201
undrilled Ø 230 mm		(Viton®)			T521B4401
o. Bohrungen Ø 230 mm**)		Other on request.			T521B4401F
DN 100 PN 10/16 Type B		request.	8,7	19.2	T539B4401
DN 100 PN 10/16 Type B**)			8,6	19.0	T539B4401F
DN 100 PN 25/40 Type B					T540B4401
DN 100 PN 25/40 Type B**)					T540B4401F
DN 100 PN 25/40 Type E	SS				T538B4401F
4" ASA 150			8,9	19.6	T563B4401
4" ASA 150**)			8,9	19.6	T563B4401F
4" ASA 300 psi			12	26.5	T564B4401
4" ASA 300 psi**)			12	26.5	T564B4401F
DIN 28459 'TW 3' / DN 100					T566B4401
4" TTMA			2,5	5.5	T568B4401

According to NATO STANAG 3756



- *) Type E (with spigot), EN 1092-1, see page 44
- **) Flange with standard thickness
- PN 10/16/25/40 = EN 1092 (types see page 44), ASA = ANSI B16.5 (150 o. 300 psi), DIN 28459 = old standard TW, 10 bar. TTMA = Truck Trailer Manufacturers Association
- ²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- ³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request

4" (Ø 164 mm) Hose Unit (Coupler) - Female Thread

Connection 1)	Body	Seal ³⁾		Wei	ght ≈	Mann Tek		
Inch/DN	Material ²⁾	O-Ring	O-Ring Thread Seal		lbs	Code No.		
F 4 BSP			PUR	7,6	16.8	S516B1101B		
F 4" ASSPT	Al		(Polyurethane)			S5136B1101B		
F 4" NPT		Standard: FPM/FKM (Viton®)	Standard:	_	7,9	14.2	S517B1101	
F 4" BSP				FPM/FKM	PUR	17,5	38.6	S516B2201B
F 4" ASSPT	GM		(Polyurethane)			S5136B2201B		
F 4" NPT		Other on	_	17,7	39.0	S517B2201		
F 4" BSP		request.	DTEE	15,6	34.4	S516B4401A		
F 4" ASSPT	SS		PTFE			S5136B4401A		
F 4" NPT			_	15,9	35.0	S517B4401		

According to NATO STANAG 3756



- F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.3, ASSPT = American Straight Pipe Thread, identical to NPS. NPT male threads can be connected with ASSPT female treads.
- ²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- ³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz®, Kalrez®, NBR or HNBR on request

4" (Ø 164 mm) Coupler - Flanged Inlet

Flower 1)	Body	Seal ³⁾	Wei	ght ≈	Mann Tek
Flange ¹⁾	Material ²⁾	O-Ring	kg	lbs	Code No.
undrilled Ø 230 mm					S521B1101
DN 100 PN 10/16 Type B			9,3	20.0	S539B1101
4" ASA 150	Al		9,4	20.7	S563B1101
4" TTMA			8,7	19.2	S568B1101
DIN 28459 'TW 3' / DN 100			8,7	19.2	S566B1101
undrilled Ø 230 mm					S521B2201
DN 100 PN 10/16 Type B					S539B2201
DN 100 PN 25/40 Type B			23,9	52.7	S540B2201
4" ASA 150	Br		23,9	52.7	S563B2201
4" ASA 300 psi		Standard: FPM/FKM			S564B2201
4" TTMA					S568B2201
DIN 28459 'TW 3' / DN 100					S566B2201
undrilled Ø 230 mm		(Viton®)	16,1	35.5	S521B4401
o. Bohrungen Ø 230 mm **)		Other on			S521B4401F
DN 100 PN 10/16 Type B		request.	16,1	35.5	S539B4401
DN 100 PN 10/16 Type B **)			16,1	35.5	S539B4401F
DN 100 PN 25/40 Type B			16,1	35.5	S540B4401
DN 100 PN 25/40 Type B **)					S540B4401F
DN 100 PN 25/40 Type E	SS				S538B4401F
4" ASA 150			21,0	46.3	S563B4401
4" ASA 150 ** ⁾			21,0	46.3	S563B4401
4" ASA 300 psi			16,1	35.5	S564B4401
4" ASA 300 psi ** ⁾					S564B4401F
4" TTMA			8,7	19.2	S568B4401
DIN 28459 'TW 3' / DN 100					S566B4401

According to NATO STANAG 3756



- *) Type E (with spigot), EN 1092-1, see page 44
- **) Flange with standard thickness
- 1) PN 10/16/25/40 = EN 1092 (types see page 44), ASA = ANSI B16.5 (150 o. 300 psi), DIN 28459 = old standard TW, 10 bar. TTMA = Truck Trailer Manufacturers Association
- ²⁾ Material: Al = Aluminium, GM = Gunmetal, SS = Stainless Steel
- ³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request

6" (Ø 238 mm) Technical Information

Tank Unit (Adapter) and Hose Unit (Coupler)



Material	Maximum Working Pressure	Test Pressure	Minimum Burst Pressure
Aluminium	10 bar / 145 psi	15 bar / 218 psi	50 bar / 726 psi
Stainless Steel	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi

Connections

6" in BSP, NPT and flanged inlet.

Applications

Recommended for marine bunkering, ship to shore transfer, ship to ship transfer and ship to rig transfer or on any application where spillage needs to be minimized.

Media

Petroleum products: gasoline, diesel, oil etc. **Chemical products:** ethylene oxide, propylene oxide, acrylonitrile, butadiene, ammonia, vinyl chloride, toluene, xylene, sulphuric acid, phenol etc.

Dry powder

Material of Body

Aluminium or stainless steel; other materials on request.

Seals

Standard seals FPM (Viton®), EPDM, FFKM (Chemraz®, Kalrez®), NBR. Other on request.

High Flow Rates / Low Pressure Drop

Allows maximum product transfer with minimal losses

Recommended Maximum Flow Rates

7500 litres/minute (fuel)

Selectivity

- avoid mixing products

To avoid product contamination caused by connecting a hose unit to the wrong tank unit, selective versions of the hose and tank units are available.

Each unit has a number of selective positions, designated by a coded part number according to the coupling size – specify when placing order. See page 32 ff.

Interchangeability

Compatible with couplings of other manufacturers.

Hose Unit with Integrated Swivel

All hose units are supplied with an integrated swivel.


6" (Ø 238 mm) Tank Unit (Adapter) - Female Thread

Connection 1)	Body	Se	Seal		ght ≈	Mann Tek	
Inch/DN	Material ²⁾	O-Ring ³⁾	Thread Seal	kg	lbs	Code No.	
F 6" BSP	Al	Standard:	PUR	6,7	14.8	T6110B1101B	
F 6" NPT	AI	FPM/FKM (Viton®)	_	7,1	15.7	T6111B1101	
F 6" BSP		Other on request.	PTFE	15,7	34.6	T6110B4401A	
F 6" NPT	SS		_	17,6	38.8	T6111B4401	



6" (Ø 238 mm) Tank Unit (Adapter) - Flanged Inlet

Flange ^{1B)}	Body Seal ³⁾ V		Weig	ght ≈	Mann Tek
riange	Material ²⁾	O-Ring	kg	lbs	Code No.
DN 150 PN 10/16 Type A	Al	request.	8,6	19.0	T645B1101
6" ASA 150	Al		7,5	16.5	T6100B1101
DN 150 PN 10/16 Type B	SS		22,4	49.4	T645B4401
6" ASA 150			22,4	49.4	T6100B4401



6" (Ø 238 mm) Hose Unit (Coupler) - Female Thread

Connection 1)	Body	Se	Seal		ght ≈	Mann Tek
Inch/DN	Material ²⁾	O-Ring ³⁾	Thread Seal	kg	lbs	Code No.
F 6" BSP	Al	Standard:	PUR	22,3	49.2	S6110B1101B
F 6" NPT	AI	FPM/FKM (Viton®)	_			S6111B1101
F 6" BSP	SS	Other on	PTFE			S6110B4401A
F 6" NPT	33	request.	_	45,0	99.2	S6111B4401



6" (Ø 238 mm) Coupler - Flanged Inlet

Flower (B)	Body	Seal ³⁾	Weig	ght ≈	Mann Tek	
Flange ^{1B)}	Material ²⁾	O-Ring	kg	lbs	Code No.	
DN 150 PN 10/16 Type A	Al	Standard:			S645B1101	
6" ASA 150	Al	FPM/FKM		25,9	57.1	S6100B1101
DN 150 PN 10/16 Type B	ss	Other on			S645B4401	
6" ASA 150		request.	49,5	109.1	S6100B4401	



 $^{^{1}A)}$ F = Female thread, BSP = EN ISO 228, NPT = ANSI B1.20.1

^{1B)} PN 10/16/25/40 = EN 1092 (types see page 44), ASA 150 = ANSI B16.5,150 psi

²⁾ Material: Al = Aluminium, SS = Stainless Steel

³⁾ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®], NBR or HNBR on request

8" (Ø 272 mm) Technical Information

Tank Unit (Adapter) and Hose Unit (Coupler)



Material	Maximum Working Pressure	Test Pressure	Minimum Burst Pressure
Aluminium	10 bar / 145 psi	15 bar / 218 psi	50 bar / 726 psi
Stainless Steel	16 bar / 232 psi	24 bar / 348 psi	80 bar / 1160 psi

Connections

8" flanged inlet (or NPT thread)

Applications

Recommended for marine bunkering, ship to shore transfer, ship to ship transfer and ship to rig transfer or on any application where spillage needs to be minimized.

Media

Petroleum products: gasoline, diesel, oil etc.
Chemical products: ethylene oxide,
propylene oxide, acrylonitrile, butadiene, ammonia,
vinyl chloride, toluene, xylene, sulphuric acid,
phenol etc.
Dry powder

Material of Body

Aluminium, brass/gunmetal, stainless steel, Hastelloy and PEEK. Other materials on request.

Seals

Standard seals FPM (Viton®), EPDM, FFKM (Chemraz®, Kalrez®), NBR. Other on request.

High Flow Rates / Low Pressure Drop

Allows maximum product transfer with minimal losses

Recommended Maximum Flow Rates

13000 litres/minute (fuel)

Selectivity

- avoid mixing products

To avoid product contamination caused by connecting a hose unit to the wrong tank unit, selective versions of the hose and tank units are available.

Each unit has a number of selective positions, designated by a coded part number according to the coupling size – specify when placing order. See page 32 ff.

Interchangeability

Compatible with couplings of other manufacturers.

Hose Unit with Integrated Swivel


All hose units are supplied with an integrated swivel.

ООО «ТИ-СИСТЕМС» ИНЖИНИРИНГ И ПОСТАВКА ТЕХНОЛОГИЧЕСКОГО ОБОРУДОВАНИЯ

8" (Ø 272 mm) DDCouplings

8" (Ø 272 mm) Tank Unit (Adapter) - Flanged Inlet

Flores 1)	Body	Seal ³⁾	Weig	ght ≈	Mann Tek	
Flange ¹⁾	Material ²⁾	O-Ring	kg	lbs	Code No.	
DN 200 PN 10 Type A	Al				T8102A1101	
DN 200 PN 16 Type A		Standard: FPM/FKM (Viton®)			T8103A1101	
8" ASA 150					T8105A1101	
DN 200 PN 10 Type B					T8102A4401	
DN 200 PN 16 Type B	ss	SS	Other on request.			T8103A4401
8" ASA 150			39,0	86.0	T8105A4401	



8" (Ø 272 mm) Coupler - Flanged Inlet

Flange ¹⁾	Body	Seal ³⁾	Weig	ght ≈	Mann Tek	
rialige /	Material ²⁾	O-Ring	kg	lbs	Code No.	
DN 200 PN 10 Type A	Al				S8102A1101	
DN 200 PN 16 Type A			Standard:			S8103A1101
8" ASA 150		FPM/FKM	93,0	205.0	S8105A1101	
DN 200 PN 10 Type B	ss	(Viton®)			S8102A4401	
DN 200 PN 16 Type B		Other on request.			S8103A4401	
8" ASA 150			93,0	205.0	S8105A4401	



^{*)} alternatively also available with NPT female inlet

^{*)} alternatively also available with NPT female inlet

¹⁾ PN 10/16/25/40 = EN 1092 (types see page 44), ASA = ANSI B16.5 (150 psi)

²⁾ Material: Al = Aluminium, SS = Stainless Steel

 $^{^{\}scriptscriptstyle (3)}$ Standard seal FPM/FKM. Alternative materials, e.g. EPDM, Chemraz $^{\scriptscriptstyle (8)}$, Kalrez $^{\scriptscriptstyle (8)}$, NBR or HNBR on request

Dust cap for Tank Unit

Dust Cap for Tank Unit (Adapter)

To increase the lifespan of DDC tank units, dust caps should be used. They protect the couplings against the ingress of dirt and water.

Materials: polyethylene, aluminum, stainless steel or rubber. Supplied with cable attachment and eyelets (rubber design DN 40 - 50 with integrated eyelet).

With the exception of the simple rubber type, the caps feature a safeguard against inadvertent release: before removing the cap, a spring-loaded locking pin is pulled.

Polyethylene composite caps in sizes in sizes DN 40-80 mm include a patented design with lip seal to facilitate the handling.



Rubber

Stainless Steel



Inch/DN Material 1) Seal 2)		Weight ≈		Mann Tek	
mon/ Bit	Waterial	Ocai	kg	lbs	Code No.
34"-1" Ø 56 mm, DN 20-25	PE	Standard:	0,1	0.29	C100A2201
	Al	FPM	0,2	0.49	C100A1101
	SS	(Viton®)	0,6	1.30	C100A4401
	PE	NBR	0,1	0.2	C200E2202
1½-2"	Al	Standard:	0,3	0.7	C200A1101
Ø 70 mm, DN 40-50	SS	FPM	0,6	1.3	C200C4401
	Rubber	(Viton®)	0,1	0.3	C200D1300
	PE	NBR	0,2	0,4	C300E2202
2½" Ø 105 mm, DN 65 SS	Al	Standard: FPM			C300A1101
	SS	(Viton®)	1,5	3,3	C300C4401
	PE	NBR	0,2	0,5	C400E2202
3"	Al	Standard: FPM			C400A1101
Ø 119 mm, DN 80	SS	(Viton®)			C400C4401
	Rubber	_			C400D1300
	PE		0,2	0,5	C500E2202
4" Ø 164 mm, DN 100	Al		1,2	2,5	C500B1101
	SS		2,5	5,5	C500C4401
6" Ø 238 mm, DN 150	PE	Standard: FPM			C600A2201
	Al	(Viton®)	1,6	3,4	C600A1101
	SS				C600A4401
8"	Al				C800B1101
Ø 272 mm, DN 200	SS				C800B4401



¹⁾ Material: PE = Polyethylen-Composite, AI = Aluminium, SS = Stainless Steel, Rubber = NBR/PVC

²⁾ Standard seal FPM/FKM or NBR. Alternative materials, e.g. EPDM, Chemraz[®], Kalrez[®] or HNBR on request

Pressure Cap for Tank Unit (Adapter)

used as third closing device according to ADR/RID, par. 6.8.2.2.2

Mann Tek pressure caps have been developed to increase the safety of the operating personnel and improve leak protection.

In case of an upstream leakage (male coupling untight) or extensive pressue buildup within the tank outlet due to expanding gas, the cap will indicate it. The operator relieves the pressure by pressing the lever and can then safely remove the cap.

Features

- Corresponds to ADR/RID regulations
- Third closing device' for road and rail tankers, containers
- · Working pressure up to 25 bar
- Excess pressure indicator
- Safe relief for pressure and vacuum
- Customs /tamper sealing possible (holes for sealing wire)
- · Automatic locking
- Anti-theft protection: locking with standard padlock possible




How It Works:






Pressure Indicator (warns for overpressure)



Press the handle for pressure relief, opening



Inch/DN	Material of Body1 ¹¹	Seal ²⁾	Working Pressure	Mann Tek Code No.		
1½ - 2" Ø 70 mm, DN 40-50	ss		25 bar / 363 psi	R200A4401		
2½" Ø 105 mm, DN 65	SS	Standard: FPM (Viton®)	FPM	FPM	25 bar / 363 psi	R300A4401
3" Ø 119 mm, DN 80	SS	Other on request.	25 bar / 363 psi	R400A4401		
4"	Al	·	10 bar / 145 psi	R500B1101		
Ø 164 mm, DN 100	SS		25 bar / 363 psi	R500B4401		



¹⁾ Material: Al = Aluminium, SS = Stainless Steel

³⁾ Standard seal FPM/FKM or NBR. Alternative materials, e.g. EPDM, Chemraz[®] or Kalrez[®] on request

Sealing cap for Tank Unit | Dust plug for Hose Unit

Sealing Cap for Tank Unit (Adapter) - 10 bar / 150psi

Suitable if a pressure tightness up to 10 bar - but no pressure relief - is required. Supplied with cable and mounting eyelets.

Inch/DN Material		Seal ²⁾	Weight ≈		Mann Tek	
	of Body ¹⁾		kg	lbs	Code No.	
34"-1" Ø 56 mm, DN 20-25	ss		0,6	1,30	C100P4401	
1½"-2"	Al		0,3	0.7	C200P1101	
Ø 70 mm, DN 40-50	SS Standard:	Standard: FPM	0,4	0.9	C200P4401	
2½" Ø 105 mm, DN 65	SS	(Viton®) Other on request.	(Viton®)	1,5	1.1	C300P4401
3"	Al		0,6	1.3	C400H1101	
Ø 119 mm, DN 80	SS		1,3	2.9	C400P4401	
4" Ø 164 mm, DN 100	SS		2,9	6.4	C500P4401	





Dust plug for Hose Unit (Coupler)

To increase the lifespan of couplers, dust plugs should be used. They protect the couplings against the ingress of dirt and water. Materials: polyethylene, aluminum, stainless steel. Supplied with cable attachment and eyelets.

Inch/DN	Material	Seal ²⁾	Weig	ght ≈	Mann Tek
mon/ bit	of Body ¹⁾	- Jean	kg	lbs	Code No.
0/11 411	PE		0,1	0.1	P100A2201
3⁄4"-1" Ø 56 mm, DN 20-25	Al		0,1	0.3	P100A1101
2 00 mm, 211 20 20	SS		0,3	0.7	P100A4401
44/ 011	PE		0,1	0.2	P200A2201
1½-2" Ø 70 mm, DN 40-50	Al		0,2	0.5	P200A1101
2 70 mm, 210 10 00	SS		0,2	0.6	P200A4401
24/11	PE		0,2	0.5	P300A2201
2½" Ø 105 mm, DN 65	Al	Standard: FPM (Viton®)	0,6	1.2	P300A1101
	SS				P300A4401
3" Ø 119 mm, DN 80	PE		0,1	0.2	P400A2201
	Al		0,7	1.6	P400A1101
2 110 mm, 211 00	SS	Other on request.	0,6	1.3	P400A4401
4.11	PE	·	0,2	0.4	P500B2201
4" Ø 164 mm, DN 100	Al		0,3	0.7	P500B1101
2 104 mm, BN 100	SS				P500A4401
6" Ø 238 mm, DN 150	PE				P600A2201
	Al		1,2	0.4	P600A1101
	SS				P600A4401
8"	Al		1,2	0.4	P800A1101
Ø 272 mm, DN 200	SS				P800A4401



¹⁾ Material: Al = Aluminium, SS = Stainless Steel


²⁾ Standard seal FPM/FKM or NBR. Alternative materials, e.g. EPDM, Chemraz® or Kalrez® on request

¹⁾ Material: PE=Polyethylene Composite, AI = Aluminium, SS = Stainless Steel

²⁾ Standard seal FPM/FKM or NBR. Alternative materials, e.g. EPDM, Chemraz®, Kalrez® or HNBR on request

Parking Adapter or Hose Unit (Coupler)

Coupling size	Material	Mann Tek Code-Nr.
	Al	Tool 104-1
1" (Ø 56 mm)	Al	Tool 104-1-M18*)
	SS	Tool 104-4
	33	Tool 104-4-M18*)
	Al	Tool 204-1
2"	AI	Tool 204-1-M18*)
(Ø 70 mm)	SS	Tool 204-4
	33	Tool 204-4-M18*)
	Al	Tool 304-1
2½"	Al	Tool 304-1-M18*)
(Ø 105 mm)	SS	Tool 304-4
	33	Tool 304-4-M18*)
	Al	Tool 404-1
3"	Al	Tool 404-1-M18*)
(Ø 119 mm)	SS	Tool 404-4
	33	Tool 404-4-M18*)
	Al	Tool 504-1
4"	Al	Tool 504-1-M18*)
(Ø 164 mm)	SS	Tool 504-4
	33	Tool 504-4-M18*)
	AL	Tool 604-1
6"	Al	Tool 604-1-M18*)
(Ø 238 mm)		Tool 604-4
	SS	Tool 604-4-M18*)



Parking adapters serve as a support for couplers when not in use.

They are screwed to the wall or other objects.

*) With Inductive sensor

Material: Al = Aluminium, SS = Stainless steel


Selectivity System: Overview

To prevent accidental mixing of media, a selectivity sytem for DDCouplings is available. Tank units are equipped with slots, hose units with pins.


Depending on the size of the coupling and required compatibility, the number of possible 'selectivity positions' varies.

In case of questions please consult our sales team.

Tank Unit



Hose Unit



Product	Size	Position
Avgas 100 / 130	2½", 3", 4"	1
Avgas 108 / 135	2½", 3", 4"	2
Avgas 115 / 145	2½", 3", 4"	3
Avtur (Derd 2495) JP1, ATK, ATF 650. JET 'A'	2½", 3", 4"	4
Avtag (Derd 2486) JP4, ATG, JET 'B'	2½", 3", 4"	5


Example: Aircraft Refuelling

The major oil companies have agreed to use the following selectivity positions for aviation refuelling. For the 2½", 3" and 4" sizes.

Selectivity System for 1" (Ø 56 mm)

Coupling diameter:

Ø56 mm (3/4"-1")

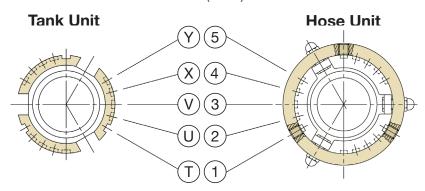

Selectivity s	system:
---------------	---------

Interchangable with other manufacturers.

Each unit can be provided with selectivity according to two systems – with 5 or 10 positions (see chart).

When ordering, please add "/SEL" and the chosen selectivity to the Mann Tek Code No.

Examples: S103A4401/SEL 1 (T) or S103A4401/SEL 12 (TU)

Media	Position
acrylonitrile	4 (X)
ethylene oxide	2 (U)
Propylene eoxid	3 (V)

Selectivity positions for acrylonitrile, ethylene oxide and propylene oxide for 1"

With 5 Positions

Т	U	V	X	Υ
1	2	3	4	5

With 10 Positions


TU	TV	TX	TY	UV
12	13	14	15	23
24	25	34	35	45

UX UY VX VY XY

Selectivity System for 2" (Ø 70 mm)

Coupling diameter:

Ø 70 mm (1½"-2")

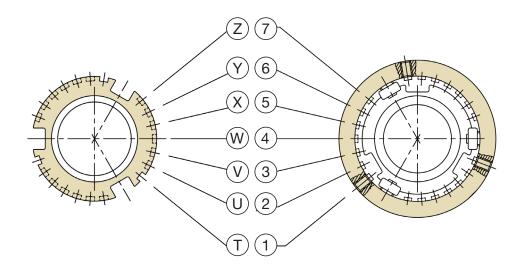

Media	Position
acrylonitrile	X (5)
ethylene oxide	V (3)
propylene oxide	W (4)

Selectivity positions for acrylonitrile, ethylene oxide and propylene oxide for 2"

With 7 Positions

Т	U	V	W	X	Υ	Z
1	2	3	4	5	6	7

Selectivity System:

NATO STANAG 3756. Interchangable with other manufacturers.

Each unit can be provided with selectivity according to two systems – with 7 or 21 positions (see chart).

When ordering, please add "/SEL" and the chosen selectivity to the Mann Tek Code No.

Examples: S210A4401A/**SEL 1** (T) or S210A4401A/**SEL 12** (TU)

With 21 Positions

TU	TV	TW	TX	TY	TZ	UV	UW	UX	UY	UZ
12	l									
34	35	36	37	45	46	47	56	57	67	


VW VX VY VZ WX WY WZ XY XZ YZ

Selectivity DDCouplings

Selectivity System for 2" (Ø 70 mm) – Special Version Fort Vale™

Coupling diameter:

Ø 70 mm (1½"-2")

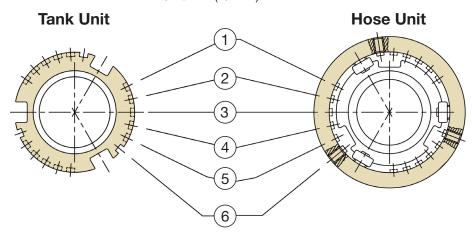

Selectivity System:

Fort Vale

Each unit can be provided with selectivity with 15 positions (see chart).

When ordering, please add the chosen selectivity to the Mann Tek Code No. Example: S210A4401A/**FV-SEL 12**


With 15 Positions

	12	13	14	15	16	23	24	25	26	34	35	36	45	46	56
L											ı				

Selectivity System for 2½" (Ø 105 mm)

Coupling diameter:

Ø 105 mm (2½")

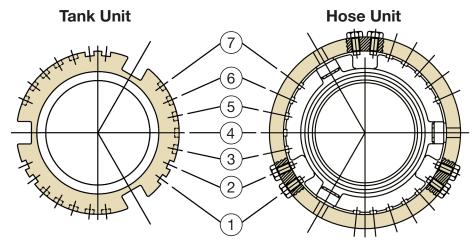

With 7 Positions

1	2	3	4	5	6	7
---	---	---	---	---	---	---

Selectivity System:

NATO STANAG 3756. Interchangable with other manufacturers.

Each unit can be provided with selectivity according to two systems – with 7 or 21 positions (see chart).

When ordering, please add "/SEL" and the chosen selectivity to the Mann Tek Code No.


Examples: S312A4401/SEL 1 or S312A4401/SEL 12 (A)

With 21 Positions

12	13	14	15	16	17	23	24	25	26	27
34	35	36	37	45	46	47	56	57	67	

Selectivity System for 2½" (Ø 105 mm) – Special Version Fulcrum

Coupling diameter:

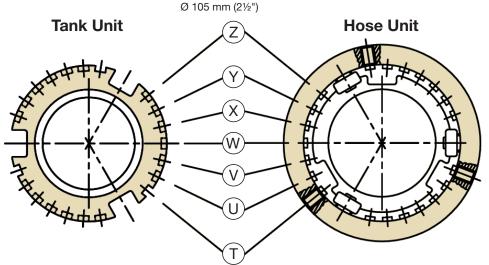

7		-	4	_		-
1	О	ວ	4	3	2	1
	6	5	4	3	2	1

Selectivity System:

Tank Unit

Fulcrum

Each unit can be provided with selectivity according to two systems – with 7 or 21 positions (see chart).

When ordering, please the chosen selectivity to the Mann Tek Code No. Examples: S312A4401/SEL 1 or S312A4401/SEL 12 (A)

With 21 Positions

TU	TV	TW	TX	TY	TZ	UV
uw	UX	UY	UZ	vw	vx	VY
VZ	wx	WY	wz	XY	XZ	YZ

Selectivity System for 3" (Ø 119 mm)

Coupling diameter: Ø 119 mm (3")

3

2

1

7 6 5 4

Hose Unit

Media	Position				
acrylonitrile	36 (P)				
ethylene oxide	34 (M)				
propylene oxide	35 (N)				

Selectivity positions for acrylonitrile, ethylene oxide and propylene oxide for 3"

Extended to the state of the st **Selectivity System:**

NATO STANAG 3756. Interchangable with other manufacturers.

Each unit can be provided with selectivity according to two systems - with 7 or 21 positions (see chart).

When ordering, please add "/SEL" and the chosen selectivity to the Mann Tek Code No.

Examples: S414A4401/SEL 1 bzw. S414A4401/SEL 12 (A)

1 2 3 4 5 6 7	2 3 4 5 6	7
---------------	-----------	---

With 7 Positions

With 21 Positions

12	13	14	15	16	17	23	24	25	26	27
34	35	36	37	45	46	47	56	57	67	

Selectivity DDCouplings

Selectivity System for 4" (Ø 164 mm)

Coupling diameter: Media **Position** Ø 164 mm (4") **Tank Unit Hose Unit** acrylonitrile **36** (P) ethylene oxide 34 (M) propylene oxide 35 (N) Selectivity positions for acrylonitrile, ethylene oxide and propylene oxide for 4". With 7 Positions 2 7 5 6

Selectivity System:

NATO STANAG 3756. Interchangable with other manufacturers.

Each unit can be provided with selectivity according to two systems – with 7 or 21 positions (see chart).


When ordering, please add "/SEL" and the chosen selectivity to the Mann Tek Code No.

Examples: S516A4401/SEL 1 or S516A4401/SEL 12 (A)

With 21 Positions

	12	13	14	15	16	17	23	24	25	26	27
;	34	35	36	37	45	46	47	56	57	67	

Selectivity System for 6" (Ø 238 mm)

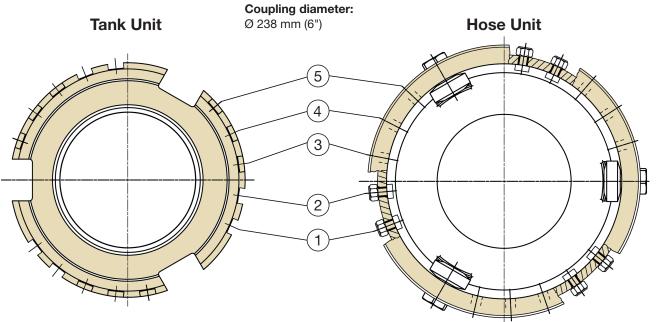

Selectivity System:

Interchangable with other manufacturers.

Each unit can be provided with 10 selectivity positions (see chart).

When ordering, please add "/SEL" and the chosen selectivity to the Mann Tek Code No. Examples: S645B4401/SEL 12

With 10 Positions

12	13	14	15	23
24	25	34	35	45

= 11/4" BSP (male)

1. Type of Coupling

```
= Sampling Vent & Drain Unit
                                                                                                                           = Dust Plug
                                                               = Dust Plug ISO 45
= Dust Cap ISO 45
= Tank Unit LPG
                                                                                                                       R = Pressure Cap
RG = Pressure Cap LPG
S = Hose Unit (STANAG 3756)
AV = Tank Unit EN 13081 (special version)
   = Ball Valve
                                                           K
    = Dust Cap
CG = Dust Cap LPG
                                                           LC
                                                               = Tank Unit Cryogenic
                                                                                                                       SN = Hose Unit int. Break Away Pin
   = Swivel
= Tank Unit with pressure valves
                                                           M = Hose Unit LPG
MC = Hose Unit Cryogenic
                                                                                                                       SO = Hose Unit int. Break Away Wire
T = Tank Unit (STANAG 3756)
    = Hose Unit (ISO 45)
                                                               = Break Away Pin
                                                                                                                          = Filter / Sight Glass
                                                           NC = Break Away Pin Cryogenic
                                                                                                                           = Dust Plug LPG
    = Tank Unit (ISO 45)
GS = Tank Unit (ISO 45) with selectivity
                                                               = Break Away Wire
                                                                                                                       WA = Hose Fittings
```

2. Socket Diameter / Nominal Diameter

```
= 50 mm or 3/4"
                                                      = 119 mm or 3"
                                                                                                          = 272 mm or 8"
= 56 mm or 1", 11/4"
                                                     = 164 mm or 4"
                                                                                                           = 10"
= 12"
= 70 mm or 1½", 2'
= 105 mm or 2½"
                                                      = 238 mm or 6"
```

3. Connection (Thread, Flange etc.)

```
146 = 5" Victaulic
147 = 2" BSPT (female)
        = 34" BSP (female)
                                                                                                                                   74 = 11/4" NPT (male)
          = ¾" NPT (female)
                                                                                                                                             = 1½" BSP (male)
                                                                                                                                            = 1½" NPT (male)
= 1¾" BSP (male)
          = 1" BSP (female)
                                                                                                                                                                                                                                                                     148 = 2" BSPT (male)
04 = 1" NPT (female)
05 = 11/4" BSP (female)
                                                                                                                                                                                                                                                                    149 = 1½" Victaulic
150 = 2½" Victaulic
                                                                                                                                            = 2" BSP (male)
                                                                                                                                   78
                                                                                                                                                                                                                                                                    150 = 2½" Victaulic

151 = Flange 1" DIN 11864-2

152 = Flange 2" DIN 11864-2

153 = Flange Ø 135, 8 x M6

154 = 4" BSPT (female)

155 = 4" BSPT (male)

156 = Weld flange 2" Ø 61,5 ID
          = 11/4" NPT (female)
                                                                                                                                            = 2" NPT (male)
         = 1½" BSP (female)
= 1½" NPT (female)
                                                                                                                                   80
                                                                                                                                            = 2½" BSP (male)
= 2½" NPT (male)
                                                                                                                                   81
          = 1¾" BSP (female)
                                                                                                                                            = 3" BSP (male)
         = 2" BSP (female)
= 2" NPT (female)
                                                                                                                                   83
                                                                                                                                            = 3" NPT (male)
= 4" BSP (male)
                                                                                                                                   84
         = 2" NPT (female)
= 2½" BSP (female)
= 2½" NPT (female)
= 3" BSP (female)
= 3" NPT (female)
= 4" BSP (female)
= 4" BSP (female)
= 18 SP (female)
= 18 SP (female)
                                                                                                                                             = 4" NPT (male)
                                                                                                                                                                                                                                                                     157 = 3" BSPT (female)
                                                                                                                                            = 4" NPT (male) =
Weld.flange 2" Ø 60,5 ID = Flange TW 1 (2" DN 50) =
Weld.flange 2" Ø 50 - Ø 70 (flat) =
Weld.flange 2" Ø 57 (int. chamfer) =
Weld.flange 2" Ø 60 (outer chamfer) =
Weld.flange 3" Ø 75 - Ø 90 (flat) =
Weld.flange 3" Ø 76 (int. chamfer) =
Weld.flange 3" Ø 89 (outer chamfer) =
Weld.flange 4" Ø 100 - Ø 120 (flat) =
Weld.flange 4" Ø 100 / Ø 120 (flat) =
Weld.flange 4" Ø 100 / Ø 120 (flat) =
                                                                                                                                                                                                                                                                    158 = Weld end 1½" Ø 48 OD
159 = Thread TR 57 x4
                                                                                                                                  86
87
                                                                                                                                                                                                                                                                    159 = 1 Fread 1R 57X4
160 = Flange 2" BS10 Table D
161 = Flange 12" ANSI Class 150
162 = Flange 10" ANSI Class 150
163 = Flange DN 250 PN 16
                                                                                                                                   90
          = Flange undrilled Ø 165
= Flange undrilled Ø 210
= Flange undrilled Ø 230
                                                                                                                                                                                                                                                                    164 = M130 x 6 (female)
165 = Flange 10" ANSI Class 300
166 = ACME 11/4" (female)
                                                                                                                                   93
                                                                                                                                            = Weld.flange 4" Ø 100 - Ø 120 (hat)

= Weld.flange 4" Ø 108 (int. chamfer)

= Weld.flange 4" Ø 114 (outer chamfer)

= Flange TW 1 (2" - DN 50)
                                                                                                                                                                                                                                                                    167 = ACME 1¾" (female)
168 = ACME 2¼" (female)
169 = ACME 3¼" (female)
          = Flange undrilled Ø 254
= Flange DN 25 PN 10/16
= Flange DN 25 PN 25/40
                                                                                                                                   96
          = Flange DN 32 PN 10/16
= Flange DN 32 PN 25/40
= Flange DN 40 PN 10/16
                                                                                                                                                                                                                                                                    170 = ACME 1¼" (male)
171 = ACME 1¾" (male)
172 = ACME 2¼" (male)
                                                                                                                                            with drain connection
= Flange DN 150 PN 25
        = Flange DN 40 PN 10/16

= Flange DN 40 PN 25/40*

= Flange DN 50 PN 25/40*

= Flange DN 50 PN 25/40*

= Flange DN 50 PN 25/40

= Flange DN 65 PN 25/40*

= Flange DN 65 PN 10/16

= Flange DN 65 PN 25/40*

= Flange DN 80 PN 25/40*

= Flange DN 80 PN 25/40

= Flange DN 80 PN 25/40

= Flange DN 100 PN 25/40
                                                                                                                                  99 = Flange DN 130 FN 25
100 = Flange 6" ANSI Class 150
101 = Flange 6" ANSI Class 300
102 = Flange DN 200 PN 10
103 = Flange DN 200 PN 16
                                                                                                                                                                                                                                                                     173 = ACME 31/4" (male)
                                                                                                                                                                                                                                                                    174 = Weld.flange Ø 76 (outer chamfer)
175 = Flange DN 15 PN 10/16
176 = Flange DN 15 PN 25/40
                                                                                                                                   104 = Flange DN 200 PN 25
105 = Flange 8" ANSI Class 150
106 = Flange 8" ANSI Class 300
                                                                                                                                                                                                                                                                    177 = M130 x 6 (male)
178 = Flange 6" T.T.M.A.
179 = Flange DN 80 PN 25/40***
                                                                                                                                   107 = Flange Square ISO 45
108 = S60 x 6 (female)
109 = S60 x 6 (male)
                                                                                                                                                                                                                                                                    180 = ½" NPT (male)
181 = ½" BSP (male)
182 = 5" BSP (female)
                                                                                                                                   110 = 6" BSP (female)
111 = 6" NPT (female)
112 = W2" - 7 (female)
                                                                                                                                                                                                                                                                    183 = 5" BSP (male)
184 = Weld end 8" Ø 219 OD
185 = Weld end 6" Ø 168 OD
           = Flange DN 100 PN 25/40*
          = Flange DN 100 PN 10/16
= Flange DN 100 PN 25/40
                                                                                                                                                                                                                                                                    186 = Flange DN 250 PN 25
187 = Flange 2" T.T.M.A.
188 = Flange 3" BS10 Table D
            = Flange DN 125 PN 6
                                                                                                                                    113 = Weld.flange 3" Ø 92 inner
          = Flange DN 125 PN 10/16
= Flange DN 125 PN 25/40
                                                                                                                                   114 = Square flange, 4 holes
115 = 6" BSP (male)
                                                                                                                                                                                                                                                                    188 = Flange ½" ANSI Class 150
189 = Flange 1" ANSI Class 150 Flat Face
191 = Flange 12" ANSI Class 300
192 = Flange DN 250 PN 10
                                                                                                                                   116 = 6" NPT (male)
117 = 8" NPT (female)
118 = 4" Victaulic
           = Flange DN 150 PN 6
          = Flange DN 150 PN 10/16
= Flange DN 150 PN 25/40
            = Flange DN 20 PN 10/16
                                                                                                                                    119 = Flange DN 50 PN 25/40**
         = Flange DN 20 PN 10/16

= Flange DN 20 PN 25/40

= Flange 34" ANSI Class 150

= Flange 34" ANSI Class 300

= Flange 1" ANSI Class 150

= Flange 11/4" ANSI Class 300

= Flange 11/4" ANSI Class 150

= Flange 11/4" ANSI Class 300

= Flange 11/4" ANSI Class 300

= Flange 11/4" ANSI Class 300

= Flange 2" ANSI Class 300
                                                                                                                                   120 = Flange DN 65 PN 25/40**
121 = Flange DN 80 PN 25/40**
                                                                                                                                                                                                                                                                    193 = Weld end Ø 114 Schedule 40
194 = Weld end Ø 114 Schedule 80
                                                                                                                                                                                                                                                                    194 = Weld end Ø 114
195 = 6" Victaulic
196 = 1" Victaulic
197 = DN 125 JIS 5K
198 = DN 100 JIS 5K
                                                                                                                                    122 = Flange DN 100 PN 25/40**
                                                                                                                                   123 = W2" - 7 (male)
124 = 5" NPT (female)
125 = 5" NPT (male)
                                                                                                                                   126 = Flange DN 100 PN 6
                                                                                                                                                                                                                                                                    199 = DN 80 JIS 5K
                                                                                                                                   127 = Flange DN 80 PN 6
128 = Flange DN 65 PN 6
                                                                                                                                                                                                                                                                    200 = DN 50 JIS 5K
                                                                                                                                                                                                                                                                    201 = DN 40 JIS 5K
        = Flange 1½" ANSI Class 300

= Flange 2" ANSI Class 150

= Flange 2" ANSI Class 300

= Flange 2½" ANSI Class 300

= Flange 2½" ANSI Class 300

= Flange 3" ANSI Class 300

= Flange 3" ANSI Class 300

= Flange 4" ANSI Class 300

= Flange 4" ANSI Class 300

= Flange TW 1 (3" - DN 80)

= Flange TW 3 (4" - DN 100)

= Flange 3" T.T.M.A.
                                                                                                                                                                                                                                                                    201 = Flange 2" DIN 11864-3
203 = 3½" BSP (female)
204 = Flange Ø 110, Ø 86/Ø 5.5 (6x)
                                                                                                                                   129 = Flange DN 50 PN 6
                                                                                                                                   130 = Flange 8" ANSI Class 600
131 = W90 x 1/6" (female)
                                                                                                                                   131 = W90 X % (female)

132 = ½" NPT (female)

133 = ½" BSP (female)

134 = Flange Ø 184.2, 6 holes

135 = Flange TW 7 (6" - DN 150)

136 = 4" ASSPT (female)
                                                                                                                                                                                                                                                                    205 = Weld end Ø 60 Schedule 80
                                                                                                                                                                                                                                                                    206 = \text{Weld end } \emptyset  89 Schedule 40 207 = \text{Weld end } \emptyset  89 Schedule 80
                                                                                                                                                                                                                                                                    208 = Flange DN 25 PN 6
                                                                                                                                                                                                                                                                    209 = Flange DN 32 PN 6
210 = Flange DN 40 PN 6
211 = DN 125 JIS 10K
                                                                                                                                   137 = Triclamp DN 25
138 = M54 x 1,5 (female)
         = Flange 3" T.T.M.A.
= Flange 4" T.T.M.A.
= ¾" BSP (male)
                                                                                                                                   139 = Triclamp DN 50
                                                                                                                                                                                                                                                                    212 = DN 100 JIS 10K
                                                                                                                                 140 = Weld, flange Ø 73 (outer chamfer)

141 = 3" Victaulic

142 = Flange 5" ANSI Class 150

143 = 3" Ball valve

144 = 2" Victaulic
                                                                                                                                                                                                                                                                    213 = DN 80 JIS 10K
                                                                                                                                                                                                                                                                    214 = DN 50 JIS 10K
          = 3/4" NPT (male)
= 3/4" NPT (male)
= 1" BSP (male)
= 1" NPT (male)
                                                                                                                                                                                                                                                                    215 = DN 40 JIS 10K
```

216 = Flange DN 80, holes Ø 14 (6x) 217 = Flanges 5" ANSI Class 300

NOTE: When swivels are chosen (first sign: D), the second and the third sign indicate thread side 1 one, the fourth and the fifth sign the second outlet indicate thread side 2.

Mann Teknik 2012

145 = 3" BSPT (male)

4. Version

= Version No. 1 (machined from bar)

= Version No.2 (casted)

С = Version No. 3 (kokill casted)

D = Sep. piston guide = Injection moulded = 6" Flange Hydrant = Drain connection = Leaf spring lock

= Bent (dropped) Tank Unit, short (15°)

= Bent (dropped) Tank Unit (15°) = Short Tank Unit/Swivel

= Non Return Valve

= Pressure (Custom)

S = Sight Glass Т = Transparent

= Stop before disconnected U

5. Material Coupling and Body

= Aluminium

2 = Brass 3 = Steel

= Edelstahl 1.4408 (AISI 316)

= Edelstahl 1.4301 (AISI 304)

= Titan = Hastelloy 8 = PVDF = PEEK

= Aluminium K = Inconel

6. Material in the Innerparts

= Brass = Steel

= Stainless steel A4 (316)

= Stainless steel 1.4301

= Inconel

7. O-Rings

01 = Viton® (FPM/FKM)

= Nitrile (NBR)

= EPDM

04 = Kalrez® (FFKM) 6375

= NBR Low temp 05

= Teflon® (PTFE) 06

= Neoprene® (CR)

= Silicone (Q) 09 = Polyurethane (PUR)

= Butyl (IIR) 10

= Nitrile (Gasol NBR 70 K-6) 11

= Perfluorelastomer (FFPM/FFKM)

13 = PVC/NBR

= Fluorsilicone rubber (MFQ) 14

= FEP encapsulated silicone

= Hypalon® (CSM)

= Chemraz® 505 (FFKM)

= Xyflour® 860 (AFKM)

= Zetpol® / Therban® (HNBR) 19

= NBR 90° shore 20

= Viton®-GF (Special Viton quality) 21

= Composite = Viton® GFLT-S

= Viton® GLT 24 25 = Klingerit®

26 = POM

= Epiclorhydrin (ECO) = Viton® GFLT-S NMO

= Viton® 90 Shore (FPM/FKM)

= EPDM 291

34 = Kalrez® 0040

= Chemraz® 510 (90 Shore)

= FEP or PTFE encapsulated Viton®

8

= Titan

= PEEK

= Hastelloy = PVDF

50 = Kalrez® (PFPM) 1050LF

= Nylon® (PA) 51

= Viton® (FPM), FDA, USP C6 & ADI 61 = Nitrile (NBR), FDA, USP C6 & ADI

= EPDM, FDA, USP C6 & ADI

= Kalrez® (FFKM) 6230, FDA, USP C6 & ADI

= PTFE (Virgin), FDA 66

= FPM/FKM Low Temp

= Chemraz® SD517, FDA, USP C6 & ADI

= EPDM, BAM certified for oxygene

8. Flat (Thread) Seals / Extras

= Flat Seal, Teflon® (PTFE) Α

В = Flat Seal, Vulkollan® (PUR)

С = 2-Way Ball Valve

D = Flat Seal, Viton® (FPM) DA = Double Acting (Ball Valve)

= Tank Unit with short piston

F = Flange thickness acc. to standard

G = Flat Seal, Hypalon®

= Flat Seal, Nitrile (NBR) Н

ı = Emco compatible

J = Flat Seal, EPDM

Κ = Adapter with locked piston guide = Locked thread (maggot screw)

= Two-Step Cam Curve

= No Branding

NA = Ball Valve w. square trunnion (no actuator) W

Ρ = Pressure Equalizing Valve

Q = Sampling Vent & Drain Unit with reduced bore diameter (Argus, Hydrant) -RA = Racing

= Hose Unit with int. Break Away

= Sampling Vent & Drain Unit, only with one ball valve

= Spring Return (Ball Valve)

= TW-Flange extended circles = Pressure Bleeding Valve 16 bar U5 = Pressure Bleeding Valve 5 bar

U20 = Pressure Bleeding valve 20 bar

V = Locked Hose Unit

= Swivel with double ball valve Χ = Special surface treatment

Ζ = Excentric Tank Unit

-LC = Locking Cap

-S = FEP O-Ring in Hose Unit swivel

-ST = Steam

-XL = Oversized swivel

-45 = 45 Mesh

-60 = 60 Mesh


-10 = 100 Mesh

ID-Tag on Coupling:

€ 0038 *Mann-Tek* Sweden (Ear) II 2G S210A4401A Ø70 PS25bar Seal:FPM/PTFE 2" BSP Mtrl:SS ID:72194 Year:2008/02 TÜ-AGG 304-99

Example:


2" (Ø 70 mm) Hose Unit (Coupler), female thread

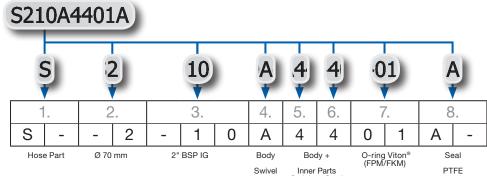

Selection of registred trade names from BASF, Bayer AG, B.F. Goodrich, Chemische Werke Hüls, Daikin, Dow Company, DSM, DuPont, DuPont Dow Elastomers, Esso Chemie, Hercules, Hoechst AG, Montedison, Monteflous, Nippon Zeon, Polysar LTD., Rhone Poulenc, 3M Company, Wacker Chemie, Precision Polymer Engineering Ltd.

Couplings with Special Flanges

On request we manufacture all combinations of flange thickness / holes and length

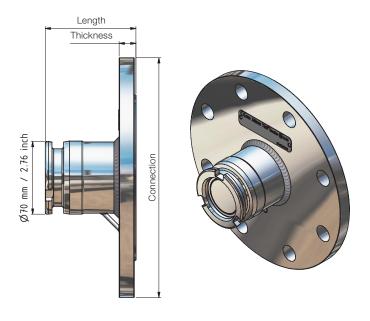

Example: 2" (Ø 70 mm) tank unit (adapter) with flange 4" ANSI 150 psi, Code No: T263A4401

Tank Unit with Short Piston



When coupled, the piston spindle does not protrude. This special type is useful e.g. for the direct connection to ball vallves.

Example Mann Tek Code No.: T230B1101**E**

Tank Unit with Drain Connection




For easy venting and sampling.

Available for all tank units with flange.

Example Mann Tek Code No.: T2**98**G1101 (f. TW1 Flansch)

Tank Unit (Adapter) - Excentrical Flange







Tank unit (adapter) with excentrical flange, available in sizes from 1" to 6".

Example 2" (Ø 70 mm) tank unit with excentrical flange 4" ASA 150, Mann Tek Code-Nr.: T263A4401**Z**

Traditional Flange



Excentrical Flange



<u>ООО «ТИ-СИСТЕМС» ИНЖИНИРИНГ И ПОСТАВКА ТЕХНОЛОГИЧЕСКОГО ОБОРУДОВАНИЯ</u>



Tank Unit / Hose Unit with flange EN 1092-1 Type E (Spigot) / Type F (Recess)



Tank Unit Flange EN 1092-1 Type E (Spigot)



Hose Unit Flange EN 1092-1 Type F (Recess)

Standard flange connections are usually executed with sealing surface Type A (Flat Face) oder Type B (Raised Face), see page 44.

Current alternatives are Type E (Spigot) and Type F (Recess), which are used from some road and rail tank manufacturers.

With Victaulic® Connection

All DDCouplings can be manufactured with grooved pipe ends, compatible with the Victaulic system.

Suitable e.g. for military and offshore applications.

Example Mann Tek Code-Nr. S2**144**A1101

Victaulic® is a registred brand name of Victaulic Europe

Hose Unit with Locking Device to Avoid Unwanted Disconnection



Example: Addition to Mann Tek Code-Nr. ... **L-S5**

After the coupling the connection is automatically locked and can not loosen unintentionally. Pulling ring version LD-S2 or lever version L-S2, available for hose units (couplers) of any size.



Example: Addition to Mann Tek Code-Nr. ... **LD-S2**

Hose Unit with Ground Cable Assembly

Ground cables serve for the safe electrostatic dissipation of electrical currents (potential equalization).

They are prescribed for some applications, e.g. for aircraft refuelling.

Materials: Cable stainless with plastic coatingl, crocodile clamp brass, including assembly.

Mann Tek Code No. **G-F3-12-XXX**. When ordering please substitute **XX** with the required length (mm).





Hose Unit with Integrated SBC Break Away




Where there is a risk of excessive force on the hose due to unexpected movement between the loading and unloading station.

For these application DDCouplings with integrated SBCouplings (Safety Break Away) are available.

Pleas add 'N' to the Mann Tek Code No., Example: SN211A4401.

Hose Unit with Non-Return Valve



The medium can not flow back when the pump switches off while the coupling is still connected. Suitable for some wet hose applications.

Example Mann Tek Code-Nr.: S210N1101B

Hose Unit for Old Emco Version



2" (Ø 70 mm) coupler in 'big mouth' special version, compatible with older Emco Wheaton tank units

Example Mann Tek Code No.: S210A1101BI

Hose Unit f. Emergency Unloading



For the emergency unloading of rail or road tankers, the swivel of the coupler must be blocked for a fast connection with standard thread connections without tools.

Several different versions are available from Mann Tek.

Extended Handles



For 2", 21/2" and 3" Hose unit

Hose Unit with Electronic Sensor

Electronic Sensor

The sensor is detecting the position of the driving plate inside the hose unit.

No modifi cation on the tank unit is needed. That makes it possible to identify if the hose unit is connected to a tank unit and if they are in an open position.

A1: DC-PNP **Z**: Option Sensor

S2: for 2" coupling A2: NAMUR Standard


S3: for 21/2" coupling S4: for 3" coupling S5: for 4" coupling S6: for 6" coupling

44: Housing material Stainless Steel

Example: additional Mann Tek Code No.

... <u>+ Z-S2-44-A1</u>








Hose or Tank Unit with Pressure Bleeding Valve

Only for special operating conditions where there is the risk of excessive pressure increase through warming in the pipe / hose system.


To protect the equipment, the optional pressure bleeding valve opens at a predetermined pressure limit.

Other applications: adapter pieces between different DDCouplings, hose assemblies with DDCouplings or DACouplings on both sides, e.g. military applications (logistic supply lines).



Example Mann Tek Code No. S210A1101B**U**

Tank Units with Pressure Equalizing Valve

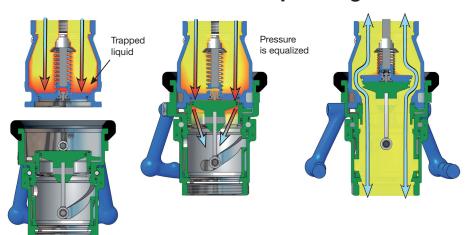

Trapped liquid in tank unit (above)

Pressure equalizing valve opens during the coupling

Open – pressure is equalized, full flow

If liquid can get trapped in the tank unit during operation so that it can not escape, there is the risk that the tank unit is damaged during coupling.

Process engineering solution: open valves behind the tank unit to relieve the trapped liquid.


Technical solution: the optional pressure equalizing valve relieves the pressure <u>during</u> <u>coupling</u> into the hose unit.

Example Mann Tek Code No. S210A1101B**P**

Sight Glass with Integrated Strainer for Petroleum Based Products

Tank an hose units in size 2½" BSP/NPT or 3" BSP/NPT are available with an additional sight glass with integrated strainer. During operation it is easy to see when the strainer shall be cleaned.





easy service of the strainerdue to quick connection –

Three different screen sizes are available, 45 mesh (350 µm), 60 mesh (250 µm) or 100 mesh (150 µm).

Example for Code No. 'Sight Glass with Strainer: U1280S1101-XX – when ordering, replace XX with -45 for 45 mesh, -60 for 60 mesh, -10 for 100 mesh.





Colour Coding



For a clear assignment of coupling and medium, the body, flange and handles of our couplings are available in any required colour.




Couplings with Aseptic Flange

DDCouplings are available with aseptic flanges to DIN 11864-2 or Triclamp flange connection.

Applications: for foodstuffs/beverages, fine chemicals, filter and water treatment plants.

Note: not suitable for pharmaceutical media with highest requirements to sterility.

On request for the mentioned coupling a test according GMP can be effected.

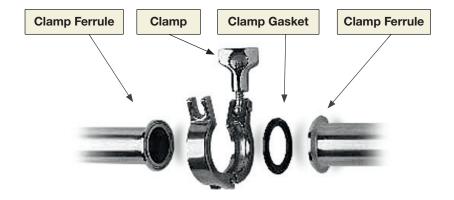


Tank and Hose Units with Aseptic Flange to DIN 11864-2

FDA conform seals



Tank and Hose Units with Triclamp Connection to DIN 32676

FDA conforme seals



Tools for the Installation/Dismounting

DDCouplings can be installed and dismounted without special tools, with standard wrenches.

Additionally, below mentioned tools are helpful to open the piston (the valve plates) to empty the system:



Tool for draining tank units



Tool for draining hose units




Wrench size to install or dismount tank and hose units:


for Coupling	Wrench Size
1"	SW 50 mm
2"	SW 65 mm
2½"	SW 85 mm
3"	SW 100 mm
4"	Tank Unit - 125 mm Hose Unit - 130 mm
6"	SW 190 mm






Flange Facing Types to EN 1092

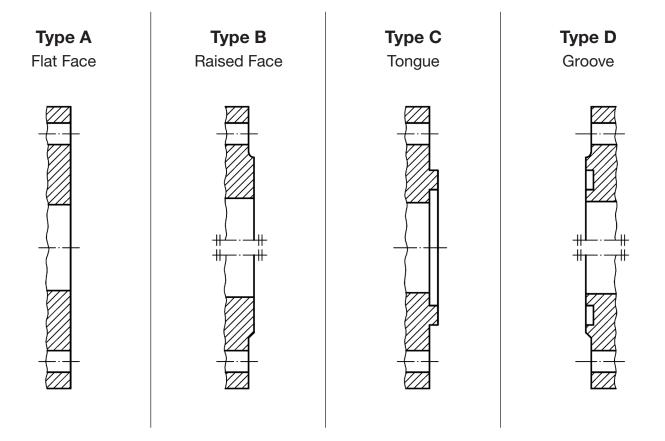

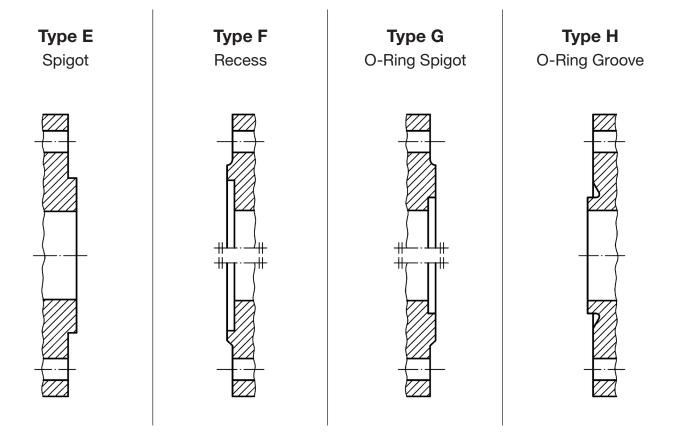

Flange Measurements

Flange Measurements - 1/2



 $\emptyset D = Diameter$

 Øk
 = Centre Diameter

 n
 = Number of Holes

 Ød
 = Hole Diameter


	EN 1092-1																
	DN PN 10				PN	16		PN 25			PN 40						
D	'N	ØD	Øk	n	Ød	ØD	Øk	n	Ød	ØD	Øk	n	Ød	ØD	Øk	n	Ød
20	mm	105	75	4	14	105	75	4	14	105	75	4	14	105	75	4	14
20	inch	4.13	2.95	4	0.55	4.13	2.95	4	0.55	4.13	2.95	4	0.55	4.13	2.95	4	0.55
25	mm	115	85	4	14	115	85	4	14	115	85	4	14	115	85	4	14
25	inch	4.53	3.35	4	0.55	4.53	3.35	4	0.55	4.53	3.35	4	0.55	4.53	3.35	4	0.55
32	mm	140	100	4	18	140	100	4	18	140	100	4	18	140	100	4	18
32	inch	5.51	3.94	7	0.71	5.51	3.94	7	0.71	5.51	3.94	4	0.71	5.51	3.94	4	0.71
40	mm	150	110	4	18	150	110	4	18	150	110	4	18	150	110	4	18
40	inch	5.91	4.33	7	0.71	5.91	4.33	7	0.71	5.91	4.33	7	0.71	5.91	4.33	7	0.71
50	mm	165	125	4	18	165	125	4	18	165	125	4	18	165	125	4	18
- 50	inch	6.50	4.92	,	0.71	6.50	4.92		0.71	6.50	4.92	7	0.71	6.50	4.92	7	0.71
65	mm	185	145	4	18	185	145	4	18	185	145	8	18	185	145	8	18
- 00	inch	7.28	5.71		0.71	7.28	5.71	7	0.71	7.28	5.71	Ü	0.71	7.28	5.71	Ŭ	0.71
80	mm	200	160	8	18	200	160	8	18	200	160	8	18	200	160	8	18
- 00	inch	7.87	6.30	ŭ	0.71	7.87	6.30	ŭ	0.71	7.87	6.30	Ů	0.71	7.87	6.30	Ŭ	0.71
100	mm	220	180	8	18	220	180	8	18	235	190	8	22	235	190	8	22
100	inch	8.66	7.09	ŭ	0.71	8.66	7.09	ŭ	0.71	9.25	7.48	Ŭ	0.87	9.25	7.48	Ŭ	0.87
125	mm	250	210	8	18	250	210	8	18	270	220	8	26	270	220	8	26
120	inch	9.84	8.27	Ů	0.71	9.84	8.27	ŭ	0.71	10.63	8.66	Ů	1.02	10.63	8.66	Ü	1.02
150	mm	285	240	8	22	285	240	8	22	300	250	8	26	300	250	8	26
100	inch	11.22	9.45	ŭ	0.87	11.22	9.45	ŭ	0.87	11.81	9.84	ŭ	1.02	11.81	9.84	ŭ	1.02
200	mm	340	295	8	22	340	295	12	22	360	310	12	26	375	320	12	30
200	inch	13.39	11.61	ŭ	0.87	13.39	11.61		0.87	14.17	12.20		1.02	14.76	12.60		1.18
250	mm	395	355	12	22	405	355	12	26	425	370	12	30	450	385	12	33
200	inch	15.55	13.98	12	0.87	15.94	13.98	12	1.02	16.73	14.57	12	1.18	17.72	15.16	12	1.30
300	mm	445	400	12	22	460	410	12	26	485	430	16	30	515	450	16	33
300	inch	17.52	15.75	12	0.87	18.11	16.14	12	1.02	19.09	16.93	10	1.18	20.28	17.65	10	1.30

Flange Translation EN 1092 / DIN (old)

EN 1092-1	DIN (old)
EN 1092-1 PN 6	DIN 2631
EN 1092-1 PN 10	DIN 2632
EN 1092-1 PN 16	DIN 2633
EN 1092-1 PN 25	DIN 2634
EN 1092-1 PN 40	DIN 2635
EN 1092-1 Type B (Raised Face)	DIN 2526 Form C
EN 1092-1 Type C (Tongue)	DIN 2512 Form F
EN 1092-1 Type D (Groove)	DIN 2512 Form N
EN 1092-1 Type E (Spigot)	DIN 2513 Form V
EN 1092-1 Type F (Recess)	DIN 2513 Form R



Flange Measurements - 2/2



 $\emptyset D = Diameter$

Øk = Centre Diametern = Number of HolesØd = Hole Diameter


ANSI (ASA) B 16,5									
l n	o b		150		300 psi				
In	GII	ØD	Øk	Øk n Ød		ØD	Øk	n	Ød
3/411	mm	98,4	69,8	4	15,9	117,5	82,5	4	19
74	inch	3%	2¾	4	5/8	4%	31/4	4	3/4
1"	mm	107,7	79,4	1	15,9	123,8	88,9	4	19
Į	inch	41/4	31/8	4	5/8	4%	3½	4	3/4
43/0	mm	117,5	88,9	4	15,9	133,3	98,4	4	19
1¾"	inch	4%	3½	4	5/8	5¼	3%	4	3/4
11/2"	mm	127	98,4	4	15,9	155,6	114,3	4	22,2
1 /2	inch	5	3%	4	5/8	61/8	41/2	4	7/8
2"	mm	152,4	120,6	4	19	165,1	127	8	19
	inch	6	4¾	4	3⁄4	6½	5	0	3/4
2½"	mm	177,8	139,7	4	19	190,5	149,2	8	22,2
2 72	inch	7	5½	4	3/4	7½	5%	0	7/8
3"	mm	190,5	152,4	4	19	209,5	168,3	8	22,2
3	inch	7½	6	4	3/4	81⁄4	6%	0	7/8
4"	mm	228,5	190,5	8	19	254	200	8	22,2
4	inch	9	7½	O	3/4	10	7%	0	7/8
5"	mm	254	215,9	8	22,2	279,4	234,9	8	22,2
5	inch	10	8½	0	7/8	11	91⁄4	0	7/8
6"	mm	279,4	241,3	8	22,2	317,5	269,9	12	22,2
0	inch	11	9½	0	7/8	12½	10%	12	7 /8
8"	mm	342,9	298,4	8	22,2	381	330,2	12	25,4
0	inch	13½	11¾	0	7∕8	15	13	12	1
10"	mm	406,4	361,9	12	25,4	444,5	387,3	16	28,6
10	inch	16	141⁄4	12	1	17½	15¼	10	11/8
12"	mm	482,6	431,8	12	25,4	520,7	450,8	16	31,7
12"	inch	19	17	12	1	20½	17¾	10	11⁄4

DIN 28459							
	D	N	ØD	Øk	n	Ød	
TW1	50	mm	154	130	8	11	
1 0 0 1	30	inch	6.06	5.12	O	0.43	
TW1	80	mm	154	130	8	11	
1 0 0 1	80	inch	6.06	5.12	0	0.43	
TW3	100	mm	174	150	8	14	
1 0 0 3	100	inch	6.85	5.91	0	0.55	
TW5	125	mm	204	176	8	14	
1 00 5	125	inch	8.03	6.93	0	0.55	
TW7	150	mm 240 210		12	14		
1 VV /	100	inch	9.45	8.27	12	0.55	

	T.T.M.A						
In	Inch		Øk	n	Ød		
2"	mm	114,3	95,3	6	11,1		
	inch	4.50	3.75	O	0.44		
3"	mm	142,9	123,8	8	11,1		
3"	inch	5.63	4.87	0	0.44		
4"	mm	168,3	149,2	8	11,1		
4	inch	6.63	5.87	0	0.44		
5"	mm	196,9	177,8	8	11,1		
3	inch	7.75	7.00	0	0.44		
6"	mm	228,6	206,4	12	11,1		
U	inch	9.00	8.13	12	0.44		
8"	mm	276,2	257,2	16	11,1		
0	inch	10.87	10.13	10	0.44		

Thread Seals (Flat Seals)

Weight ≈ kg	Thread BSP	Materials /	Dime ≈ mm	nsion	S	Mann Tek Code No.
≈ ky	DOF	Application	D	d	S	Code No.
0,001	BSP ½"		20	13	2	On request
0,001	BSP ¾"		26	19	2	1498-06
0,002	BSP 1"	1	33	24	2	1220-06
0,003	BSP 11/4"	PTFE (Teflon®)	42	34	2	1536-06
0,003	BSP 1½"	white, massive continuously hard,	48	39	2	1196-06
0,004	BSP 2"	universally resistant Teflon® is a registred	60	49	2	1052-06
0,007	BSP 2½"	trademark of DuPont	76	63	2,5	1181-06
0,006	BSP 3"	1	88	77	3	1110-06
0,009	BSP 4"	1	114	100	3	1295-06
0,016	BSP 6"]	164	150	3	1963-06
0,001	BSP ½"		20	13	2	On request
0,001	BSP ¾"	1	26	19	2	1498-25
0,002	BSP 1"	Thermopac	33	24	2	1220-25
0,002	BSP 11/4"	·	42	34	2	1536-25
0,003	BSP 1½"	asbestos free, light, hard. Especially for hot oils	48	39	2	1196-25
0,004	BSP 2"	and hot bitumen up to 250° C and for hot water	60	49	2	1052-25
0,005	BSP 2½"	and saturated steam up	76	63	3	1181-25
0,009	BSP 3"	to 25 bar.	88	77	3	1110-25
0,013	BSP 4"	1	114	100	3	1295-25
0,016	BSP 6"]	164	150	3	1963-25
0,001	BSP ½"		20	13	2	On request
0,001	BSP ¾"]	26	19	2	1498-01
0,002	BSP 1"	FPM/FKM (Viton®)	33	24	2	1220-01
0,002	BSP 11/4"	i i	42	34	2	1536-01
0,003	BSP 1½"	soft for aromatic hydrocarbons and	48	39	2	1196-01
0,004	BSP 2"	hot oils.	60	49	2	1052-01
0,006	BSP 2½"	Viton® is a registred	76	63	3	1181-01
0,008	BSP 3"	trademark of DuPont.	88	77	3	1110-01
0,014	BSP 4"		114	100	3	1295-01
0,016	BSP 6"		164	150	3	1963-01
0,001	BSP ¾"		26	19	2	1498-09
0,001	BSP 1"		33	24	2	1220-09
0,001	BSP 11/4"	PUR (Polyurethane)	42	34	2	1536-09
0,002	BSP 1½ "		48	39	2	1196-09
0,003	BSP 1¾"	Flat seals type of polyurethane, hightly	54	44	2,5	On request
0,003	BSP 2"	resitant to abrasion, non-toxic.	60	49	2	1052-09
0,005	BSP 2½ "		76	63	2,5	1181-09
0,006	BSP 3"	Shore hardness = 90°. For all petroleum based	88	77	3	1110-09
0,010	BSP 3½"	products and many	100	80	3	On request
0,009	BSP 4"	solvents. Colour: Blue	114	100	3	1295-09
0,012	BSP 5" (No std.)		140	124	3	On request
0,016	BSP 6"		164	150	3	1963-09

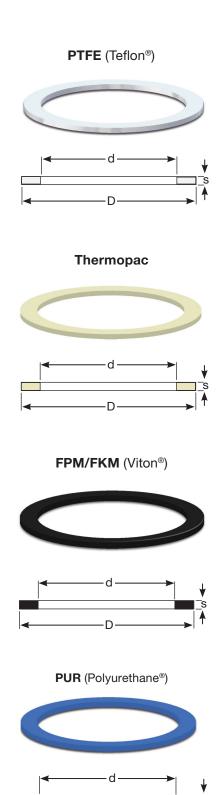

 $\label{thm:policy} \mbox{Viton} \mbox{\@normalfon{@}{\@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@normalfon{@}{\@}{\@}{\@}}}}}}}}}}}}}}}}}} \label{thm:entropy:thm$

O-Ring Materials

O-Ring Materials

Designation	Trade name	ISO 1629	ASTM 1418	Tem Ran °C		Field of Application
Nitrile Butadiene Rubber / Nitrile Rubber	Buna N® Europrene N® Hycar® Nipol N® Perbunan ®	NBR	NBR	-55	110	Petroleum based products / aliphatic hydrocarbons (gasoline, diesel, oils, petroleum, propane, butane). Animal and vegetal oils and fats. Flame retardant liquids Silicone oils and greases. Water up to 80°C.
Ethylene-Propylene Diene Rubber	Dutral Keltan [®] Vistalon [®] Buna AP [®]	EPDM	EPDM	-55	120	Water, hot water, vapour, brake fluids, detergents. Alcohols, ketons, engine coolants, phosphate based flame retardants, organic and inorganic acids and alkalis. Not suitable for petroleum based products.
Fluoroelastomer	Fluorel® Technoflon® Viton®	FPM	FKM	-20	200	Petroleum based products / aliphatic hydrocarbons (gasoline, diesel, oils, petroleum, propane, butane) - also with high additive content. Phosphate based flame retardants. Silicone oils and greases, acids and alkalis.
Fluorosilicone Elastomer		MFQ	FVMQ	-60	200	Additional to the properties of silicone elastomers, fluorosili- cone elastomers show a consideably higher resistance to oils, fuels and solvents - especially to aromatic and aromatic and chlorinated hydrocarbons and alcohols.
Silicone	Silastic® Silopren®	MVQ	VMQ	-60	200	Very good heat and cold resistance, very good resistance to oxygene, ozone, UV rays and wheather influence. High electrical insulating properties, physiologically safe.
Hydrogenated Nitrile Butadiene Rubber	Therban [®] Tornac [®] Zetpol [®]	HNBR	HNBR	-35	120	Very good resistance to petroleum based products / aliphatic hydrocarbons like NBR, but better resistance to high temperature, ageing and wheather influence. Excellent physical properties also with high temperatures.
Butyl Rubber	Exxon Butyl [®] Polysar Butyl [®]	IIR	IIR	-55	100	For O-Rings this material has largely been replaced by EPDM. Butyl is resistant to the same fluid types as EPDM and -except for resistance to gas permeation- it is somewhat inferior to EPDM for O-Ring use. Excellent weather resistance and gas permeation resistance. Not suitable for petroleum based products.
Perfluorinated Elastomer	CHEMRAZ® Kalrez® PERLAST®	FFPM	FFPM	-40	260	Best chemical resistance of all elastomers, including organic acids, acetic acid, benzoic acid, formic acid.
Chloroprene Rubber	Baypren® Neoprene®	CR	CR	-40	120	Resistant to refrigerants, ammonia, carbon dioxide, freon (R12, R13, R21, R22, R113 - R115), silicone oils, water, oxygen (low pressure), alkalis, coustic soda, alcohols, chlorine, ozone, castor oil and vegetable oils. Properties of CR are similar to NBR but slightly lower resistance to petroleum based producs, better resistance to ageing, UV light and ozone.
Polyester / Polyether Urethane Rubber	Polyurethane Adiprene® Urepan® Desmopan®	PU PUR AU EU	AU EU	-40	100	Very good resistance to petroleum based products, also with aromatic content. Good resistance to ozone and ageing. Very good mechanical properties. Not resistant to esters, concentrated acids and lyes, water above +50° C.
Polytetrafluoroethylene	Teflon [®]	PTFE	PTFE	-200	260	Universal chemical resistance except liquid alkaline metals and some fluorine compounds. Very good anti friction properties, low wear. High temperature resistance. Physiologically safe. Use for statical seals only.
Fluorinated Ethylene Propylene	Teflon FEP®	FEP/MVQ	FEP/VMQ	-60	200	Universal chemical resistance except liquid alkaline metals and some fluorine compounds.
		FEP/FPM	FEP/FKM	-20	200	Very good anti friction properties, low wear. High temperature resistance. Physiologically safe.
Perflouralkoxy	Teflon PFA®	PFA/MVQ	PFA/VMQ	-60	250	Universal chemical resistance except liquid alkaline metals and some fluorine compounds.
		PFA/FPM	PFA/FKM	-20	250	Very good anti friction properties, low wear. High temperature resistance. Physiologically safe.
Tetrafluoroethylene- Propylene Copolymer Elastomer	Aflas [®]		TFE / P	-25	200	Petroleum based products, oils and greases, brake fluids, fuels, alcohols, heat transfer media, oils. amines, acids, alkalis.


Note: Specifications in this chart are based on the information given by our suppliers together with published guides. This is not always a guarantee for a proper function. If in doubt, please ask our sales team, stating medium and operating conditions.

Comparison NPT and BSP Threads

NPT (Conical Thread)

Please observe the following basic rules:

- **1.** Always use some type of sealant (tape or paste) and apply sealant to male thread only. If using a hydraulic sealant, allow sufficient curing time before system is pressurized.
- 2. When using tape sealant, wrap the threads in a clockwise motion, starting at the first thread (open end of the coupling) and following the thread direction.
- **3.** When using paste sealant, apply to threads with a brush, using the brush to work the sealant into the threads. Apply enough sealant to fill in all the threads all the way around.
- **4.** When connecting two pars of the same material that will require future disassembly, use a special sealant paste to avoid seizure (galling) of the thread.
- **5.** When connecting parts made of different metals (e.g. steel and aluminium), standard tape or paste sealant is sufficient.
- **6.** For sizes 2" and below, tape and paste perform satisfactory. When using thread tape, four wraps (covering all necessary threads) are usually sufficient.
- **7.** For sizes 2½" and above, thread paste is recommended. If thread tape is used, eight wraps (covering all necessary threads) are usually sufficient. Apply more wraps if necessary.
- **8.** For stubborn-to-seal threads, apply a normal coating of thread paste followed by a normal layer of thread tape.



9. For extremely stubborn to seal threads, apply a normal coating of thread paste followed by a single layer of gauze bandage followed by a normal layer of thread tape.

Note: When this procedure is done, the connection becomes permanent. Extreme measures will be necessary to disconnect these components. All other measures to seal the threads should be explored prior to use of this technique.

10. Over-tightening threads can be just as detrimental as insufficient tightening.

Couplings with conical (tapered) female and male threads normally have no flat sealing surface. The screwed-on thread jams before the end of the counter thread is covered. Therefore a sealing with a thread seal is not possible. The overall length of such a connection is always longer than the equivalent flat sealing system. A safe and promptly tight connection requires expert knowledge and clean work and is time-consuming. Subsequent tightening during operation is not possible. A new assembly requires the proper cleaning of the pitch from all squashed and hardenedremains of the sealing compounds.


For these reasons, BSP parallel threads should be preferred.

BSP (Parallel Thread)

Easy sealing with flat thread seals:

Standard hose fittings are supplied with parallel threads and a flat sealing surface. This allows to use the full thread length for screwed-on parts. Due to the short length, a good transfer of force is guaranteed.

The thread seal is positioned within a recess of the female part and can not fall out. For a safe connection, the parts simply have to be screwed together – subsequent tightening during operation is possible at any time. A change of seals or reassembly do not require any expert knowledge. The European standardisations for hose assemblies require parallel threads with flat seals, because of these advantages.



Operating Advice for Mann Tek Couplings

This advice is supplementary to your standard terminal operational procedures.

DACouplings, DDCouplings and DG-Couplings are specifically designed for the bulk transfer of liquids and vapours. The materials of construction, including the seals should already be confirmed as compatible prior to installation. If in doubt, check before operation. Our help documents "Installation advice for DA-Couplings, DDCouplings and DGCouplings" plus "Specification Advice" are designed to assist you.

All DACouplings, DDCouplings and DG-Couplings are marked with a maximum pressure rating that shall not to be exceeded. With careful use and regular maintenance they will give safe and trouble free operating for many years.

Service instructions are available for all DACouplings, DDCouplings and DGCouplings upon request. The life expectancy and maintenance frequency of the couplings is dependent upon many variables such as cycles/day, pressures, contaminates etc., but the most significant factor besides correct installation is the correct use. The following information is designed to assist in your care of the couplings and associated equipment.

Daily visual inspection

All hose units should be briefly inspected at the start of each day's operation. Look inside the connection socket. Check that the three rollers are not obviously damaged. Check that the connection socket area is free from dirt and foreign objects.

Check for signs of seal damage (e.g. you may see a cut seal or small pieces of rubber coming from the piston area).

Check that the swivel of the hose unit rotates freely. For the first use, check for leakage and smooth coupling operation.

Each tank unit on the truck should also be briefly checked prior to use. Check for dirt, tightness and any obvious physical damage.

Connecting & disconnecting

- a) Hose unit: When making the connection make sure that all relevant isolation valves connected to the hose unit are closed. Also check that no pumping pressure is present at the hose unit.
- b) Tank unit: Make sure that all isolation valves behind the tank unit in the pipe work are fully open.
- c) Lift the hose unit and hose into position to start the connection. Take care to support the hose end assembly so as to present the hose unit to the tank unit in the correct orientation. It is important to ensure that the hose unit is not supporting the full weight of the hose assembly during the connection process. Once connected, the hose unit will accommodate all reasonable strain of a balanced loading arm or hose assembly. The handles have no operating purpose other than providing handling assistance during the connection phase.
- d) When correctly supported, the hose unit should slide easily over the tank unit. The three rollers engage in the three slots in any one of three positions at 120 degree centre. To allow the hose unit to locate to the tank unit, and still supporting the hose assembly, rotate the hose unit whilst gently pushing towards the tank unit
- e) Still supporting the hose assembly, rotate the hose unit clockwise about 100 degrees. At the start of rotation you will feel some resistance. The level of resistance is dependent upon the static line and tank pressure. The higher the pressure, the greater the effort necessary to connect the coupling.

At the completion of the 100 degree turn you will feel a definite stop. Do not attempt to rotate the unit further. Further rotation does not tighten the connection or open the valves more, it only cause unnecessary damage. Hose and tank unit valves are now open and the loading process can start.

f) The sequence of isolation valve andpump operation should be taken from your operating procedures. Preferably, the isolation valve on the tank unit side should be opened *first*, because trapped liquid in the tank unit could make it impossible to couple. The isolation valve on the hose unit side is usually opened *after* coupling.

- g) Disconnect the coupling in reverse order. First, all isolation valves should be closed and - where possible - the pumps be switched off. Where a common pumping system is in use, all flow through the coupling shall be stopped using the isolation valves and not by the coupling. Closing the isolation valve on the hose unit side first is preferred because of the reasons stated in section (f), as long as this is compatible with your standard operating procedures.
- h) Whilst supporting the hose unit assembly, turn the hose unit anti-clockwise approximately 100 degrees. You may feel a slight "pop off" effect at the end of the rotation travel when transferring liquids with an elevated vapour pressure. This is normal. Do not attempt to rotate the hose unit further. This will not further loosen the connection or secure the seal, it only causes unnecessary damage.
- i) While supporting the hose assembly, pull the hose unit away from the tank unit. You may feel a small resistance due to seal vacuum. Correctly supported, the hose unit will come away from the tank unit with ease.
- j) The hose assembly should be stowed in a manner so as to avoid physical damage. Do not drop the hose end assembly or stow on the floor. The dust plug provided should always be fitted.
- k) Ensure the tank unit dust cap (if fitted) is coupled and secured.
- I) Do not use anything other than the handles provided to operate the coupling. The handles are specifically designed to provide sufficient assistance in operation. Should the couplings become difficult to operate, they should be inspected prior to further use. Under no circumstances should the couplings be subjected to excessive force. The use of damaged or faulty equipment may have serious safety consequences.

Service Instructions for DDCouplings

OUR RECOMMENADTIONS: Daily inspection:

- 1. Inspect the coupling surface for cleanliness and corrosion
- 2. Inspect the O-ring in the hose unit connection for serviceability and correct seating in the groove
- 3. Inspect the hose unit swivel for free rotation
- 4. Inspect tank and hose unit for faultlessness and external signs of leakage
- 5. Inspect the hose unit rollers for easy rotation and for external signs of seizure

Instructions for Correct Installation and Maintenance of Mann Tek Couplings

All DACouplings, DDCouplings and DG-Couplings are designed for trouble free operation in a wide range of applications and operating conditions.

Reliable and safe operation is dependent upon the correct installation and handling of the equipment.

Regular and appropriate maintenance is essential to ensure both safety and reliability over the life of the equipment.

Specifications

Before you install Mann Tek couplings, it is essential to check that the material and performance specifications are acceptable for your specific application. The pressure ratings and primary materials of the construction are clearly indicated on the identification tag of each Mann Tek product. A drawing showing the materials of construction relating to each individual component is available upon request. If required, the technical department at Mann Tek will provide

guidance on material suitability. Our data is taken from published chemical resistance information as well as our own application experiences.

Specification checks should always be carried out before the product is supplied, but if unsure, please ask. Especially if you are using the couplings outside the standard temperature range (-20°C to +80°C), ask for confirmation regarding your application.

Do not assume that a Mann Tek coupling supplied for one specific application automatically will be suitable for other similar applications.

Many variables affect the performance of materials. If you wish to use a DACoupling, DDCoupling or DGCoupling for a different application than the one originally specified, check with Mann Tek to ensure compatibility before installation. Please remember, the application details should include all media transferred through the

coupling, not just the primary transferred media.

As with all equipment, a check should be made to ensure that the installation fulfils the requirements of applicable prevailing industry, local, national and international standards.

Particular attention should be paid to pressure ratings, safety factors and the position of upstream and downstream affiliated closures.

Installation

The correct installation of Mann Tek Couplings is essential to ensure safe and satisfactory operation. Checks should be made to ensure that their installation does not interfere with the correct operation of affiliated equipment (i. e. isolation valve, excess flow valves, etc).

continued on next page

continued from previous page

Instructions for Correct Installation and Maintenance of Mann Tek Couplings

Before securing the flange or thread connection to the mating equipment (i. e. hose, loading arm, storage tank) ensure that no dirt or foreign objects are present in the coupling. All flange and thread connections should be made without excessive strain to the equipment. Prior to use they should be pressure checked at least to 1.5 times of the maximum application working pressure. All gaskets and sealing materials used to make the permanent connection should be of suitable material and able to operate at least up to the maximum parameters of the Mann Tek coupling.

When installing DACouplings, DDCouplings and DGCouplings to new pipe work, tanks etc. ensure the system is free from debris that may be transferred through the coupling.

Where the hose or loading arm assembly is the primary static dissipation or earth route, the electrical continuity value of the assembly shall be checked to ensure regulatory compliance.

Special attention should be paid to the balancing of loading arms. The weight of the coupling plus transfer media should be taken into account at the specification stage. It is usual for loading arm balance settings to account of weight variations due to differences in the full/empty cycle. The loading arm should be set to balance in the condition present at the time or connection. For example, should the loading arm be empty at the time of connection then it should be balanced in the empty condition.

Each DACoupling, DDCoupling and DG-Coupling is designed to take reasonable loads associated with good handling practice but is not designed to accept continuous excessive loads associated with maladjustment or poor installation. Continuous excessive strain will lead to increased component wear and, if no actions will be taken, damaging the coupling and adjacent units up to failure of the connection. This means, under circumstances, high follow-up costs for environmental and personal injuries.

When Mann Tek couplings are used with hoses, attention should be paid to hose length to ensure correct handling characteristics. The hose assembly should be designed such that the hose weight is supported by the coupling or the operator. Hoses should have a sufficient length to ensure operation well within the stipulated hose minimum bending radius. It is recommended to apply Safety Break-Away Couplings to protect the whole loading equipment against unintended external forces, e.g. caused by a drive-away accident. Further, measures against electrostatic loads are needed, especially at higher flow velocities (above approx. 5 m/s for fuels).

Prior to putting the system in use, a function check should be carried out. The hose unit (coupler) should connect and disconnect without physical interference or difficulty. Please note – the higher the static pressure, the greater the effort to make a connection. For more details please read the 'Operating Advice for Mann Tek Couplings'.

Maintenance

All DACouplings, DDCouplings and DG-Couplings should be visually checked for damage, etc. on a daily or shift basis according to the handling instructions. Any sign of damage or operating difficulty should be reported and acted upon at the earliest opportunity. Do not continue to use any equipment that is not operating satisfactorily as continued use will cause further deterioration and possible equipment failure.

Mann Tek couplings are designed such that all normal wear parts are included in appropriate maintenance kits. For normal applications, where the material is not, or only marginally attacked by the medium, the coupling will be fully usable after the regular maintenance.

We recommend that the coupling is fully inspected, tested and serviced at least once a year. It must be accepted that some applications cause a greater level of component degradation either by


chemical attack or by arduous physical or environmental conditions. In such circumstances a more frequent regime of inspection and service may be required. We recommend that in such applications a three monthly inspection should be carried out with automatic replacement of the hose unit piston and carrier seals. All other service parts and key components should also be checked. In addition to the three monthly inspection and primary seal replacement, the hose unit shall have the full repair kit applied every year independent from component condition. After a representative period of time it may be possible to increase the service / inspection interval, but only against a background of satisfactory operation.


Full service instructions complete with photographs are available for each DA-Coupling, DDCoupling and DGCoupling size. These instructions show the service method as well as tools required and parts identification. DACouplings, DD-Couplings and DGCouplings are easy to maintain.

Some Mann Tek distributors are trained and accredited by Mann Tek to carry out service of Mann Tek couplings. Alternatively, Mann Tek offers a maintenance and repair service in their workshop. A service training can be offered as well, either on or off site to customers engineers who wish to carry out servicing themselves.

Mann Tek equipment should only be serviced by trained personnel.

The distributor of Mann Tek couplings has full responsibility to enclose this information to the customer. If the customer does not understand English the Distributor also have the responsibility to translate this document to a language the customer fully understand.

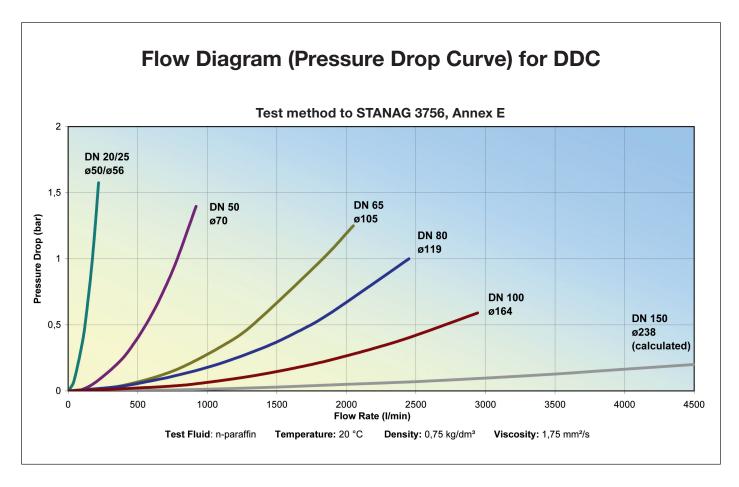

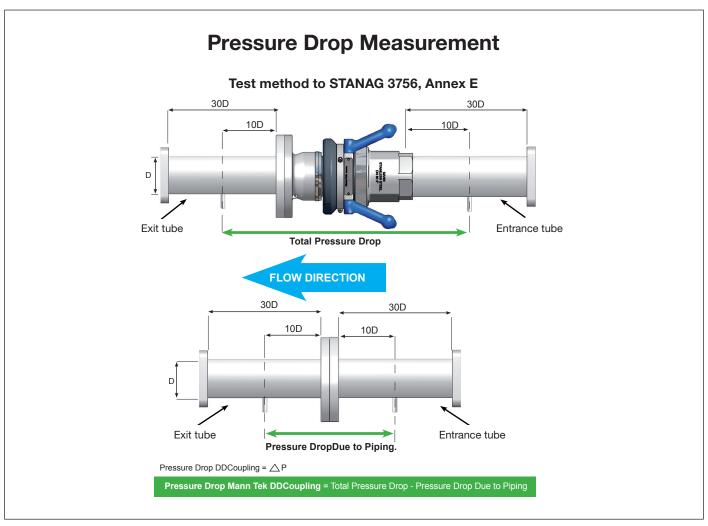

Repair service and Certificate of Decontamination

Repair Service

To comply with Health & Safety Regulations, all returned couplings and valves must be accompanied by a Certificate of Cleanliness and a data sheet for the last product carried (also for the cleaning medium).

Certificate of Decontamination

We certify that the returned couplings/valves have been cleaned prior to despatch and are free of any harmful substances.

Quantity: Code No.: Serial No.:	Quantity: Code No.: Serial No.:
Quantity: Code No.: Serial No.:	Quantity: Code No.: Serial No.:
YES NO Free of all liquid Air blown Coupling/Valve dismantled YES NO	
The last known product the coupling/valve was in contact with:	Company Name/Adress
EU/CAS/UN Number:	Signature of Supervisor:
Data sheet of last YES NO Product attached	Company Stamp:

When sending used couplings or valves to Mann Tek, please fill in this form and enclose it to the attach to the shipment.



About

Mann Tek is a Swedish manufacturer and supplier of Dry disconnect couplings with experience of the industry for more than 20 years. We supply modern, easy to use, safe and timesaving products. A environmentally safe system for both staff and its surroundings, which prevents a variety of hazards. Our products are the obvious choice in harsh and demanding environments and where there's a need of a safe and spill free handling of fluids, gases and bulk powders. With more than twenty years of knowledge and experience of multiply industries it has accumulated extensive expertise about applications in many types of variations in which our couplings have been, and can be used, with excellent results.





We constantly strive to develop and improve the performance and design of our products, to meet changes, new market demands and standards. Which, today, is what made us market leading.

Our couplings are the obvious choice when certifications and product approvals are required, anywhere in the world.

Mann Tek® is certified to ISO9001:2008 and the products are produced in accordance with several important standards, e.g. the NATO STANAG 3756, NATO STANAG 3105, ISO 45, MS24484, British Aerospace Specification 2C14

Company Approvals





Mann-Tek is a certified ISO9001-company.